


PANEL CUTOUT




PANEL THICKNESS	(x)
0.75 - 1.25	30.0
1.25 - 2.00	30.2
2.00 - 3.00	30.5

SWITCH FUNCTION	
POS. 1	POS. 2
OFF	ON
OPEN	2-1, 5-4



▲ CIRCUIT: DPST  
OFF-ON

- NOTE:
- DIMENSIONS IN MM [INCH]
  - GENERAL TOLERANCE: X.X = ± 0.4  
X.XX = ± 0.25
  - TERMINAL NUMBERS FOR REF ONLY
  - CONTACT MATERIAL: SILVER
  - CONTACT RATINGS: ANSI/UL 61058-1  
16A @ 125/250VAC [cURus]  
20A @ 125VAC [cURus]  
1/3HP 125/250VAC [cURus]  
3/4HP 125/250VAC [cURus]
  - CONTACT RESISTANCE: 20mΩ MAX. INITIAL
  - INSULATION RESISTANCE: 100MΩ MIN. @ 500VDC
  - DIELECTRIC STRENGTH: 1,000VAC FOR 1 MINUTE
  - ELECTRICAL LIFE: 6,000 CYCLES [cURus]
  - OPERATING TEMPERATURE: 0°C TO 65°C
  - ▲ DENOTES CRITICAL PARAMETER
  - ILLUMINATION: NON-ILLUMINATED

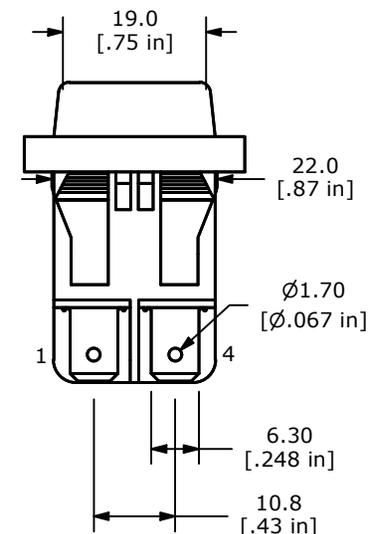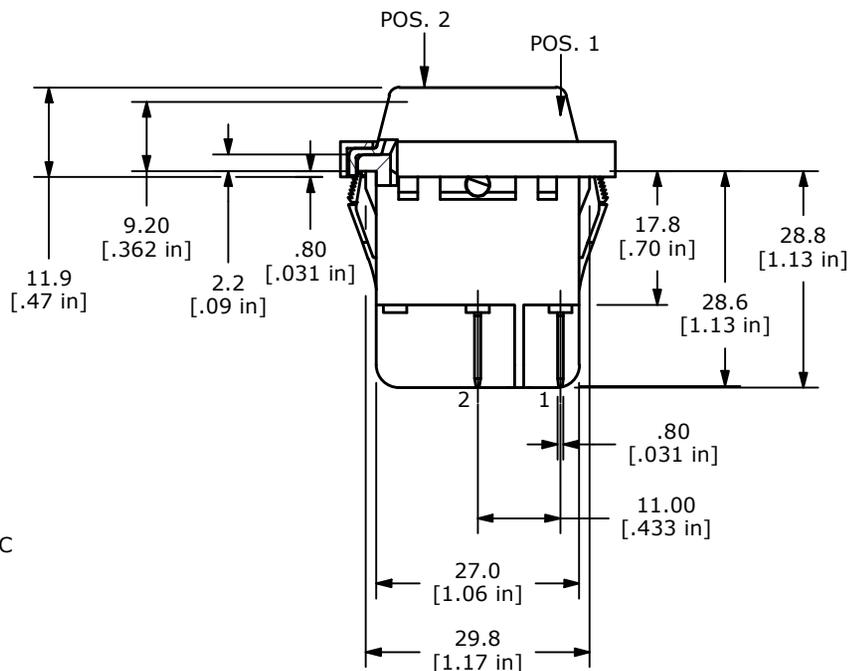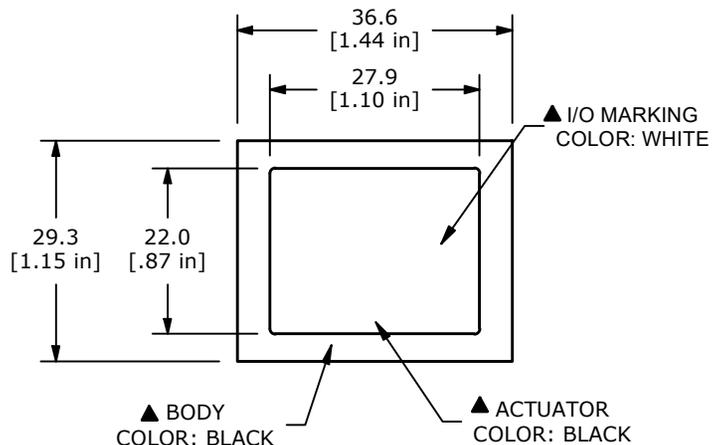

REV	ECO NO	DESCRIPTION	DATE	BY
E	ECO-102065	ACTUATOR DIM 19.0 WAS 19.2	07/12/23	MR



OBJECT ID  
000000313

TITLE RB242D1121/ACC-F02-1		SCALE 1:1	DATE 8/9/2022	DR JS	DWG 14-RB2S00009	REV E
-------------------------------	--	--------------	------------------	----------	---------------------	----------