


PANEL CUTOUT

PANEL THICKNESS	(x)
0.75 - 1.25	30.0
1.25 - 2.00	30.2
2.00 - 3.00	30.5


▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
(ON)	OFF	ON
2-3, 5-6	OPEN	2-1, 5-4

(ON) = MOMENTARY




CIRCUIT DPDT


- NOTE:
1. DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
 3. TERMINAL NUMBERS FOR REF ONLY
 4. CONTACT MATERIAL: SILVER ALLOY
 5. CONTACT RATINGS: 16A @ 125VAC [cURus]
16A @ 250VAC [cURus]
 6. CONTACT RESISTANCE: 20mΩ MAX. INITIAL
 7. INSULATION RESISTANCE: 100MΩ MIN. @ 500VDC
 8. DIELECTRIC STRENGTH: 1,000VAC FOR 1 MINUTE
 9. ELECTRICAL LIFE: 6,000 CYCLES [cURus]
 10. OPERATING TEMPERATURE: 0°C to 65°C [cURus]
 11. ▲ DENOTES CRITICAL PARAMETER

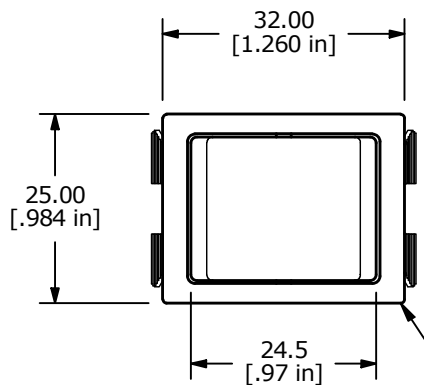

BODY COLOR: BLACK

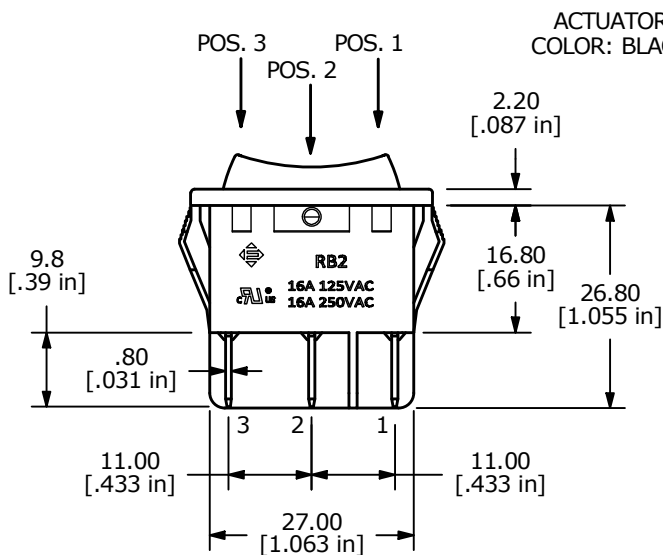

ACTUATOR COLOR: BLACK

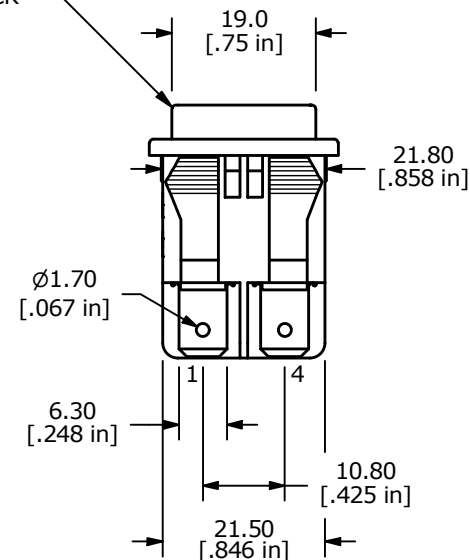

REV	ECO NO	DESCRIPTION	DATE	BY
C	ECO-100605	REMOVE VDE/ENEC RATING AND LOGO	01/04/22	JS



OBJECT ID
000000312

TITLE RB24JE1100				
SCALE 1:1	DATE 7/29/2009	DR CAB	DWG 14-RB24JE1100	REV C