


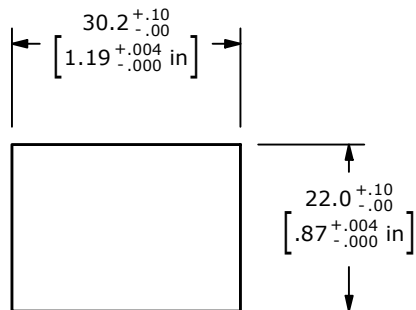


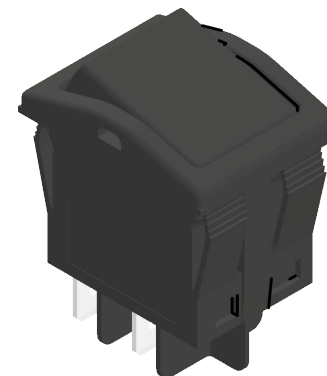



PANEL CUTOUT

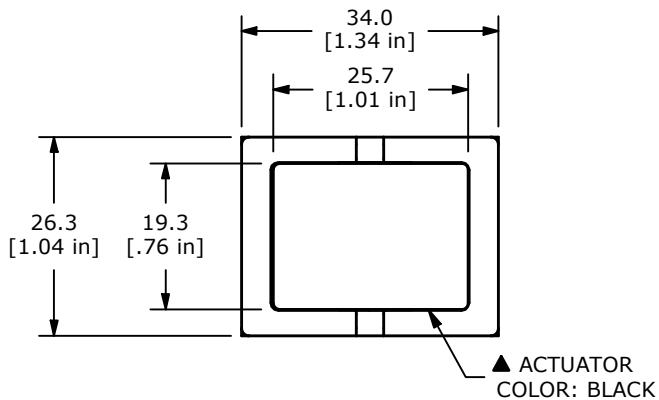


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	OFF
5-6, 3-2	N/A	OPEN



CIRCUIT: DPST
ON-OFF

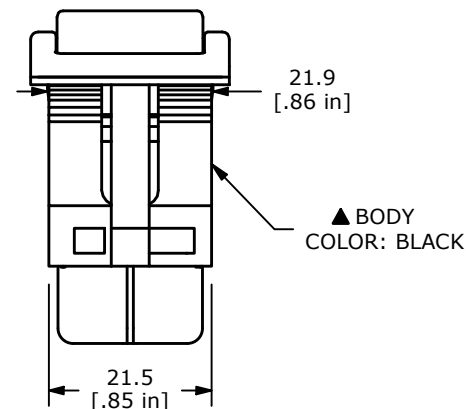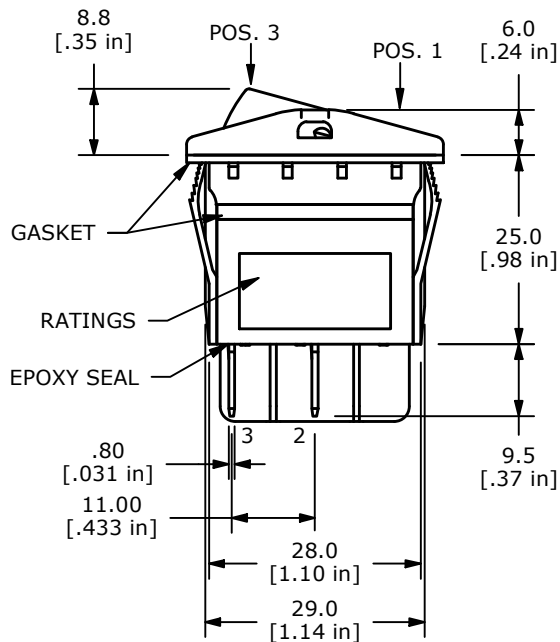

- NOTE:
- DIMENSIONS IN MM [INCH]
 - GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
 - TERMINAL NUMBERS FOR REF ONLY
 - CONTACT MATERIAL: SILVER
 - CONTACT RATINGS:
ANSI/UL 61058-1
16(8)A @ 125/250VAC T125/55 [cURus] [ENEC15]
 - CONTACT RESISTANCE: 20mΩ MAX. @ 50VAC INITIAL
 - INSULATION RESISTANCE: 100MΩ MIN. @ 500VDC
 - DIELECTRIC STRENGTH: 1,000VAC FOR 1 MINUTE
 - ELECTRICAL LIFE: 10,000 CYCLES [cURus]
 - OPERATING TEMPERATURE: 0°C to 55°C [cURus]
 - ILLUMINATION VOLTAGE: NON-ILLUMINATED
 - ▲ DENOTES CRITICAL PARAMETER



REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-103337	RELEASE	04/07/25	JS	TITLE RB54111100				100130002
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 1:1	DATE 3/28/2025	DR JS	DWG 14-RB54111100	REV A