

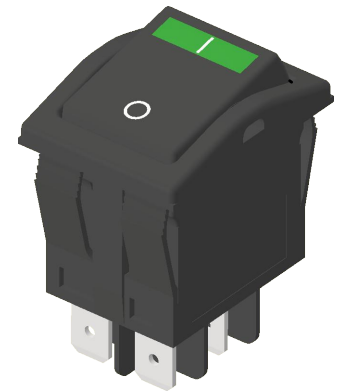






PANEL CUTOUT

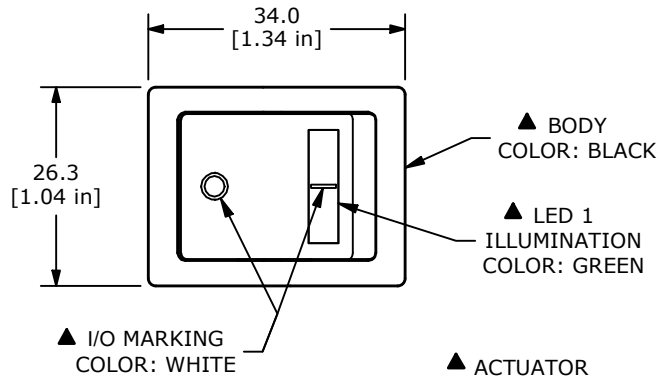

▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	OFF
5-6, 3-2	N/A	OPEN



▲ CIRCUIT: DPST ON-OFF

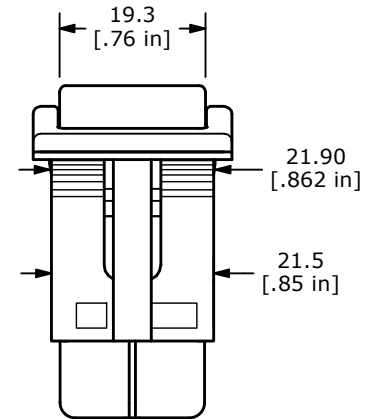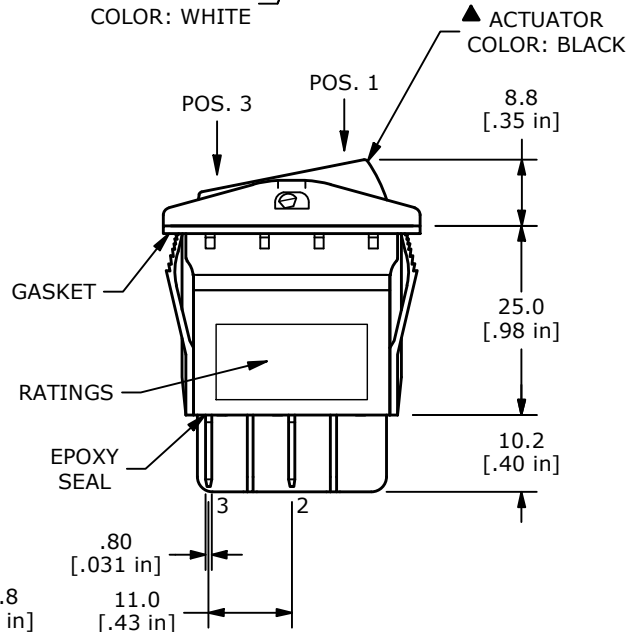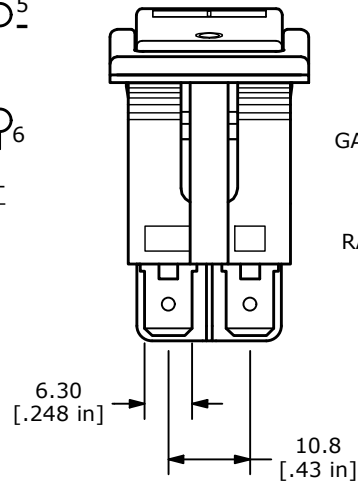

- NOTE:
1. DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
 3. TERMINAL NUMBERS FOR REF ONLY
 4. CONTACT MATERIAL: SILVER
 - ▲ 5. CONTACT RATINGS:
ANSI/UL 61058-1
16(8)A @ 125/250VAC T55 [cURus] [ENEC15]
 6. CONTACT RESISTANCE: 20mΩ MAX. @ 50VAC INITIAL
 7. INSULATION RESISTANCE: 100MΩ MIN. @ 500VDC
 8. DIELECTRIC STRENGTH: 1,000VAC FOR 1 MINUTE
 9. ELECTRICAL LIFE: 10,000 CYCLES [cURus]
 10. OPERATING TEMPERATURE: 0°C to 55°C [cURus]
 11. INGRESS PROTECTION: IP67
 - ▲ 12. ILLUMINATION VOLTAGE: 250V
 13. ▲ DENOTES CRITICAL PARAMETER

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-102831	Release	07/09/24	MW	TITLE RB541A1121-37				100127764
					SCALE 1:1	DATE 6/28/2024	DR MW	DWG 14-RB541A112137	REV A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED