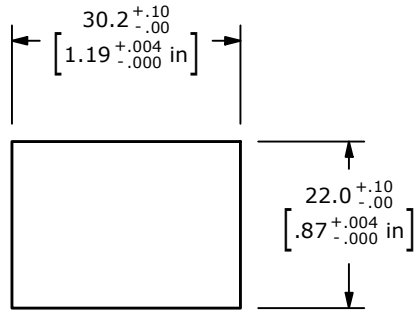
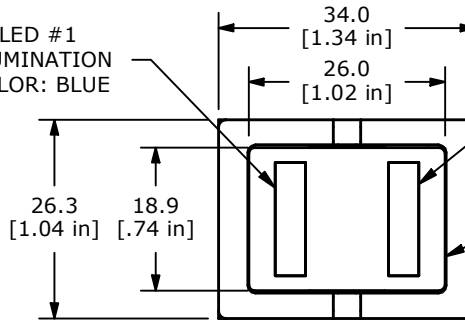
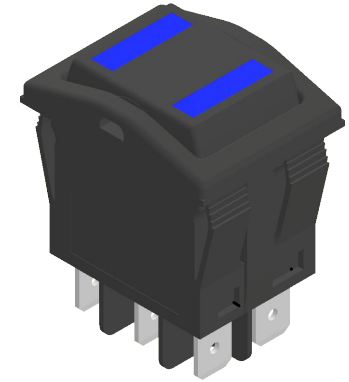




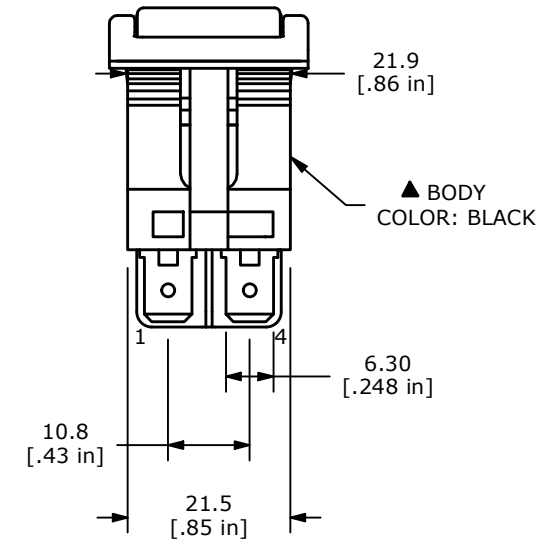
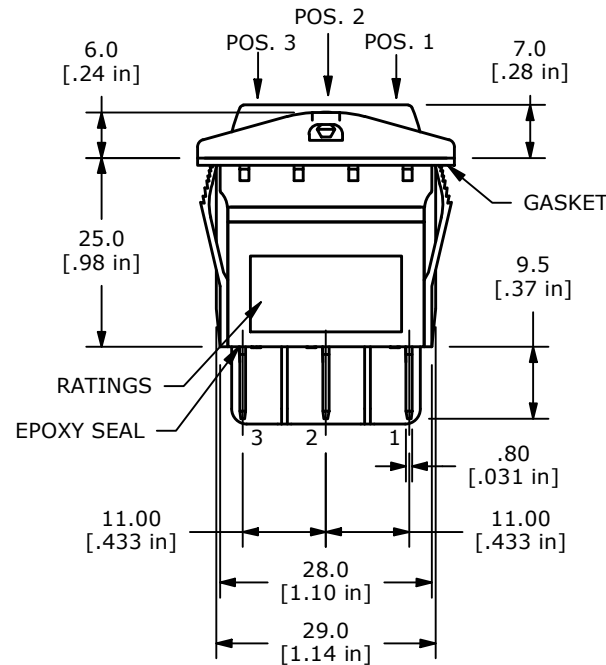


PANEL CUTOUT

PANEL THICKNESS 0.8-3.0mm

▲ LED #1
ILLUMINATION
COLOR: BLUE▲ LED #2
ILLUMINATION
COLOR: BLUE▲ ACTUATOR
COLOR: BLACK

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
(ON)	OFF	(ON)
2-3, 5-6	OPEN	1-2, 4-5

▲ CIRCUIT: DPDT
(ON)-OFF-(ON)

NOTE:

- DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: SILVER
- CONTACT RATINGS:
ANSI/UL 61058-1
16(8)A @ 125/250VAC T55 [cURus] [ENEC-15]
- CONTACT RESISTANCE: 20mΩ MAX. @ 50VAC INITIAL
- INSULATION RESISTANCE: 100MΩ MIN. @ 500VDC
- DIELECTRIC STRENGTH: 1,000VAC FOR 1 MINUTE
- ELECTRICAL LIFE: 10,000 CYCLES
- OPERATING TEMPERATURE: 0°C to 55°C
- INGRESS PROTECTION: IP67
- ILLUMINATION VOLTAGE: 12VAC
- ▲ DENOTES CRITICAL PARAMETER

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-102486	RELEASE	01/23/24	JS	TITLE RB546A1100-444				100126628
					SCALE	DATE	DR	DWG	REV
					1:1	1/18/2024	JS	14-RB546A1100444	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED