


RECOMMENDED PANEL CUTOUT





PANEL THICKNESS	X +0/- .10
0.75 - 1.25mm	19.20mm
1.25 - 2.00mm	19.40mm
2.00 - 3.00mm	19.80mm

SWITCH FUNCTION	
POS. 1	POS. 2
OFF	ON
OPEN	2-1



NOTE:

- DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: SILVER PLATED
- RATING: 16(8)A, 125/250VAC T55
- CONTACT RESISTANCE: 20m Ω MAX.
- INSULATION RESISTANCE: 100M Ω MIN. @ 500VAC
- DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE
- ELECTRICAL LIFE: 10,000 CYCLES
- OPERATING TEMPERATURE: -0°C to 55°C
- ▲ DENOTES CRITICAL PARAMETER
- ILLUMINATION VOLTAGE: NON-ILLUMINATED
- INGRESS PROTECTION: IP68

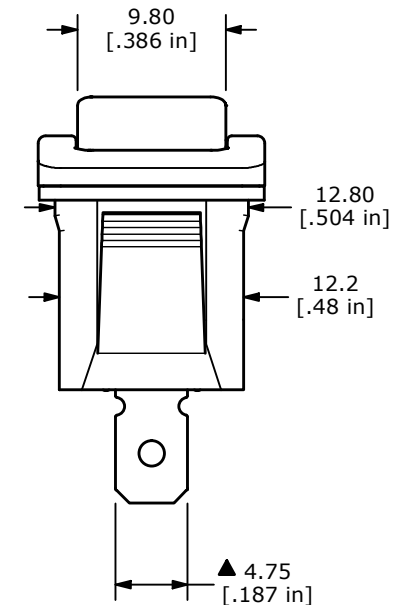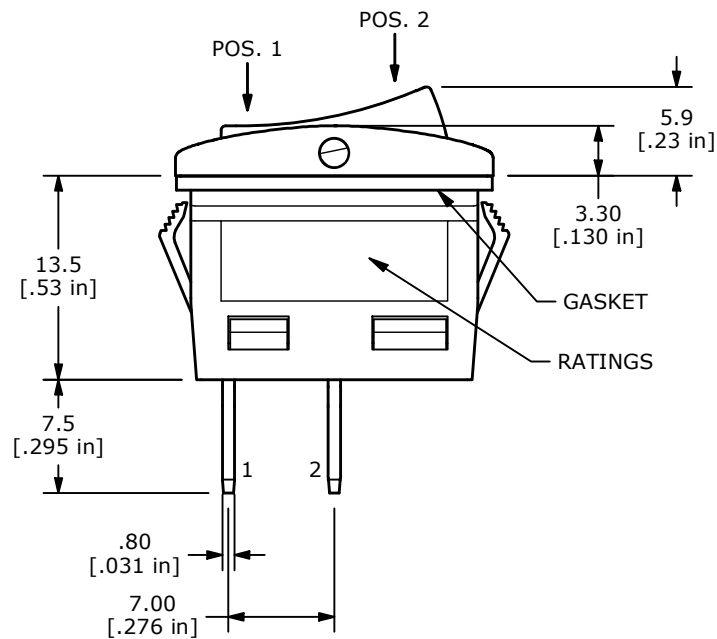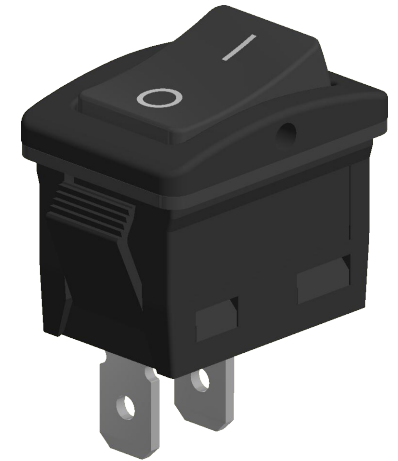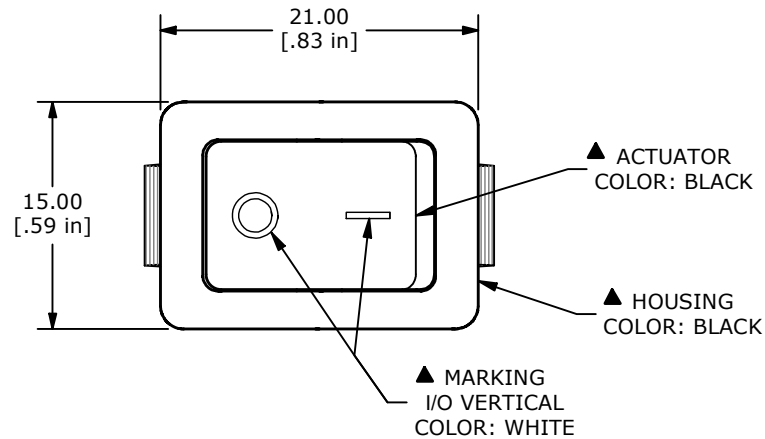

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-103254	Release	03/10/25	MW	TITLE RCA1913F1ABLKBLKWHT3				100129738
					SCALE	DATE	DR	DWG	REV
					2:1	2/18/2025	MW	C620401	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED