


RECOMMENDED PANEL CUTOUT

PANEL THICKNESS	X +0/- .10
0.75 - 1.25mm	19.20mm
1.25 - 2.00mm	19.40mm
2.00 - 3.00mm	19.80mm




SWITCH FUNCTION	
POS. 1	POS. 2
ON	ON
2-3	2-1



CIRCUIT: SPDT

NOTE:

1. DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. CONTACT MATERIAL: SILVER PLATED
5. RATING: 16(8)A, 125/250VAC T55
6. CONTACT RESISTANCE: 20m Ω MAX.
7. INSULATION RESISTANCE: 100M Ω MIN. @ 500VAC
8. DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE
9. ELECTRICAL LIFE: 10,000 CYCLES
10. OPERATING TEMPERATURE: -0°C to 55°C
11. ▲ DENOTES CRITICAL PARAMETER
12. ILLUMINATION VOLTAGE: NON-ILLUMINATED
13. INGRESS PROTECTION: IP68

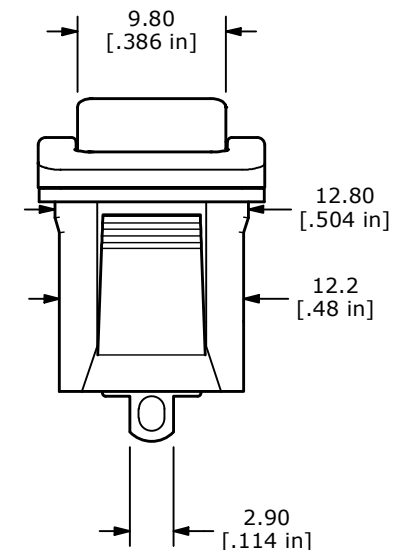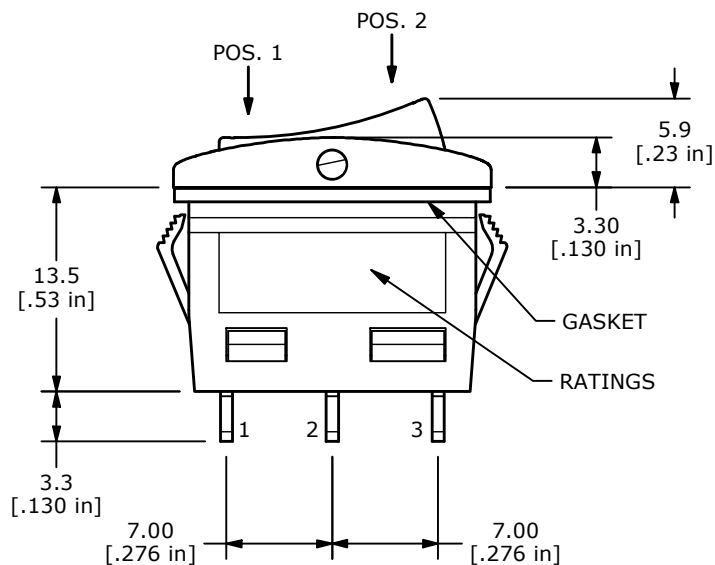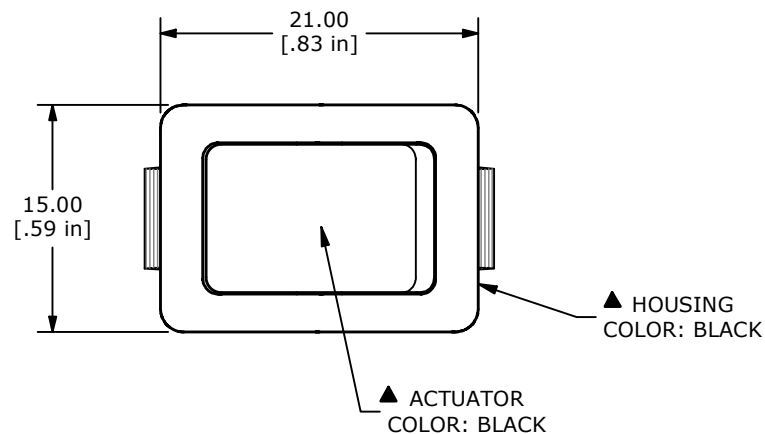

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-103255	Release	03/19/25	MW	TITLE RCA1913S2ABLKBLKNN				100129744
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 2:1	DATE 2/19/2025	DR MW	DWG C620404	REV A