






RECOMMENDED PANEL CUTOUT

PANEL THICKNESS	X +0/- .10
0.75 - 1.25mm	19.20mm
1.25 - 2.00mm	19.40mm
2.00 - 3.00mm	19.80mm

SWITCH FUNCTION	
POS. 1	POS. 2
ON	ON
2-3	2-1



- NOTE:
- DIMENSIONS IN MM [INCH]
 - GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
 - TERMINAL NUMBERS FOR REF ONLY
 - ▲ CONTACT MATERIAL: SILVER PLATED
 - RATING: 16(8)A, 125/250VAC T55
 - CONTACT RESISTANCE: 20mΩ MAX.
 - INSULATION RESISTANCE: 100MΩ MIN. @ 500VAC
 - DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE
 - ELECTRICAL LIFE: 10,000 CYCLES
 - OPERATING TEMPERATURE: -0°C to 55°C
 - ▲ DENOTES CRITICAL PARAMETER
 - ILLUMINATION VOLTAGE: NON-ILLUMINATED
 - INGRESS PROTECTION: IP68

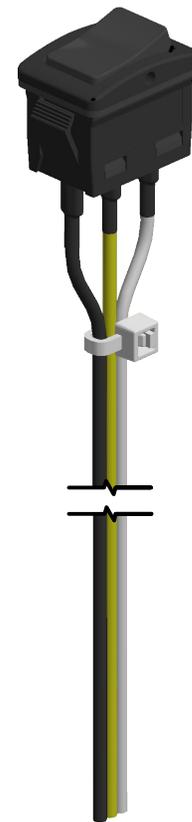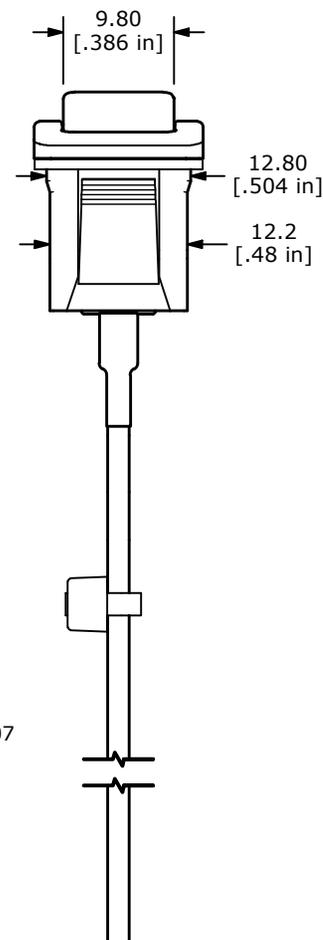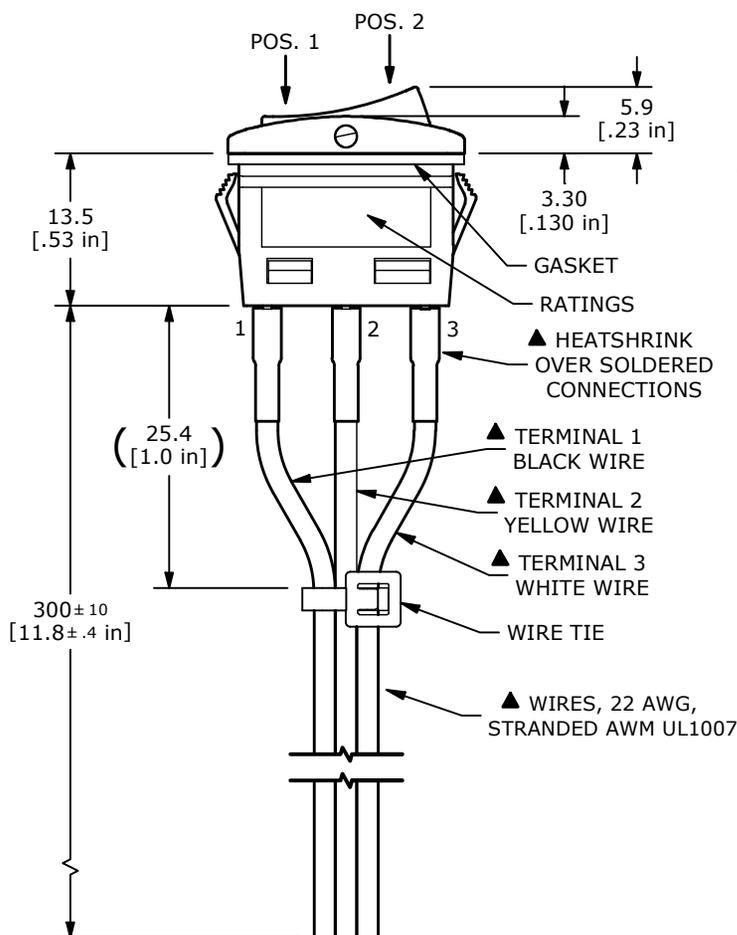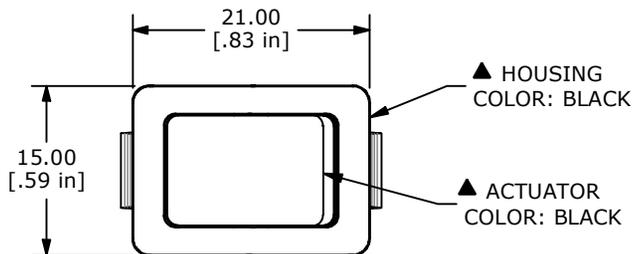

REV	ECO NO	DESCRIPTION	DATE	BY
A	ECO-103547	Release	07/24/25	MW



OBJECT ID
100130503

TITLE RCA1913W2ABLKBLKNN				
SCALE 3:2	DATE 6/27/2025	DR MW	DWG C620406	REV A