

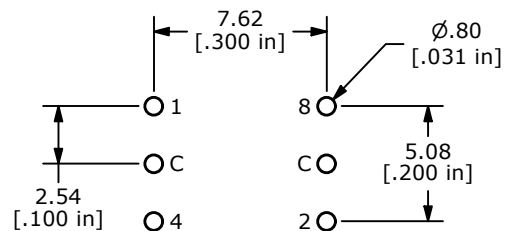
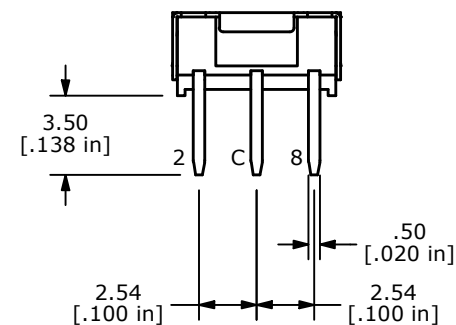
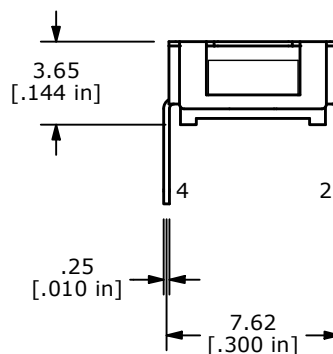


REAL CODE												
	C	1	2	4	8							
0	●					0						
1	●	●				1						
2	●		●			2						
3	●	●	●			3						
4	●					4						
5	●	●		●		5						
6	●		●	●		6						
7	●	●	●	●		7						
8	●				●	8						
9	●	●			●	9						
10	●		●		●	A						
11	●	●	●		●	B						
12	●			●	●	C						
13	●	●		●	●	D						
14	●		●	●	●	E						
15	●	●	●	●	●	F						



PCB LAYOUT

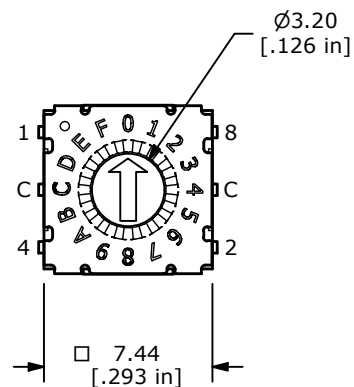

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REFERENCE ONLY
4. OPERATING FORCE: 250gf MAX.
5. CONTACT RATING: 100mA 42V DC (SWITCHING)
400mA 42V DC (NON-SWITCHING)
6. CONTACT RESISTANCE: 80m Ω MAX.
7. INSULATION RESISTANCE: 100M Ω MIN @ 250VDC
8. DIELECTRIC STRENGTH: 250VAC 1 MIN.
9. LIFE: 25,000 STEPS
10. OPERATING TEMPERATURE: -60°C to 125°C
- ▲ 11. PACKAGING: 70 PCS TUBE
12. IP RATING: IP67
13. ▲ DENOTES CRITICAL PARAMETER

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
D	ECO-102539	update operating force to 250fg Max.	02/18/24	MW	TITLE RDMAR16P1T				000026613
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV
					3:1	2/24/2011	BMA	U100004	D