



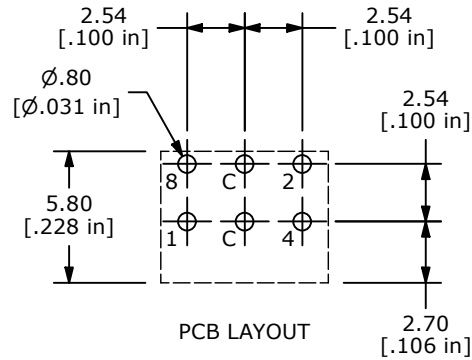


REAL CODE												
	C	1	2	4	8							
0	●											0
1	●	●										1
2	●		●									2
3	●	●	●									3
4	●			●								4
5	●	●		●								5
6	●		●	●								6
7	●	●	●	●								7
8	●				●							8
9	●	●			●							9
10			●		●							A
11	●	●			●							B
12	●			●	●							C
13	●		●	●	●							D
14	●	●	●	●	●							E
15	●	●	●	●	●							F

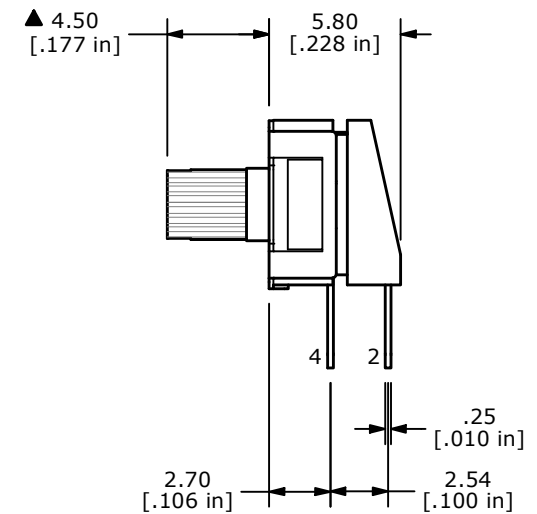

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NUMBERS FOR REFERENCE ONLY
- OPERATING FORCE: 250gf MAX.
- CONTACT RATING: 100mA, 42V DC (SWITCHING)
400mA, 42V DC (NON-SWITCHING)
- CONTACT RESISTANCE: 80m Ω MAX.
- INSULATION RESISTANCE: 100M Ω MIN @ 250VDC
- DIELECTRIC STRENGTH: 250VAC 1 MIN.
- LIFE: 25,000 STEPS
- OPERATING TEMPERATURE: -60°C to 125°C
- ▲ 11. PACKAGING: 65 PCS TUBE
12. IP RATING: IP67
- ▲ 13. ▲ DENOTES CRITICAL PARAMETER

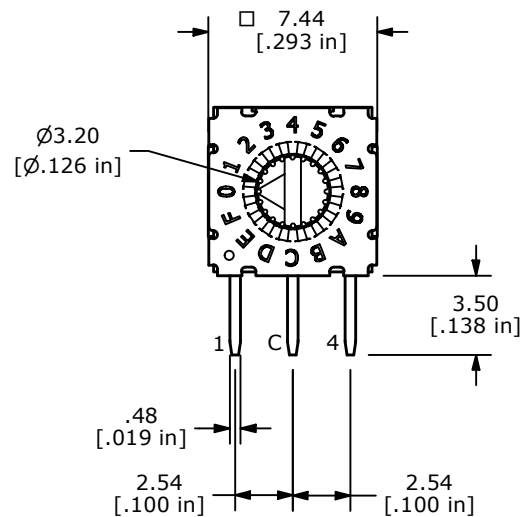

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-102540	update operating force to 250fg Max.	02/18/24	MW	TITLE RDMBR16R2T				100123090
					SCALE	DATE	DR	DWG	REV
					3:1	11/14/2022	JS	U100021	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED