

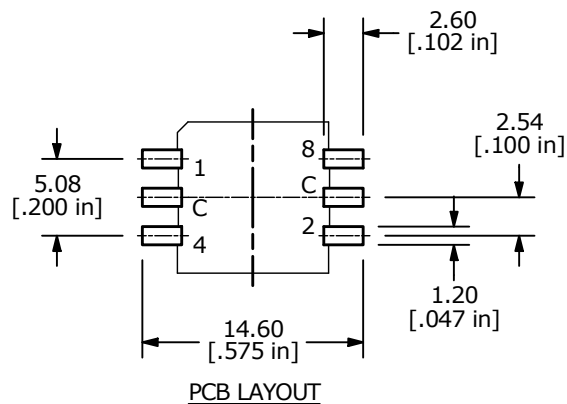

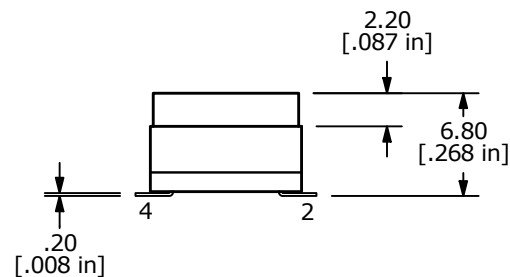





COMPLEMENT CODE

	C	1	2	4	8
0	○	○	○	○	○
1	○		○	○	○
2	○	○		○	○
3	○			○	○
4	○	○	○		○
5	○		○		○

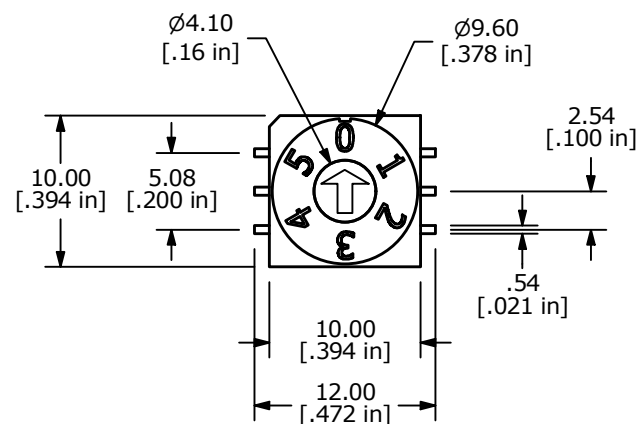

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REFERENCE ONLY
- ▲ 4. OPERATING FORCE: 700gf-cm MAX.
5. CONTACT RATING: 150mA, 42V DC (SWITCHING)
200mA, 42V DC (NON-SWITCHING)
6. CONTACT RESISTANCE: 80m Ω MAX.
7. INSULATION RESISTANCE: 100M Ω MIN @ 250VDC
8. DIELECTRIC STRENGTH: 250VAC 1 MIN.
9. LIFE: 10,000 STEPS
10. OPERATING TEMPERATURE: -60°C to 125°C
- ▲ 11. PACKAGING: 50 PCS TUBE
12. ▲ DENOTES CRITICAL PARAMETER



TITLE RDTAC06S1T

A	24532	RELEASE	10/14/20	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	DATE	DR	DWG	REV
2:1	10/14/2020	MW	U200053	A