






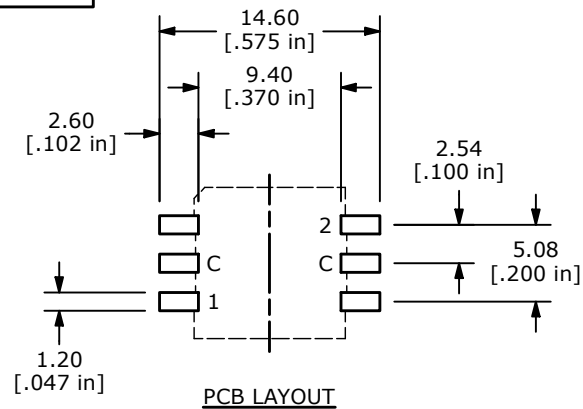


REAL CODE

	C	1	2
0	●	●	●
1	●	●	●
2	●	●	●
3	●	●	●

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NUMBERS FOR REFERENCE ONLY
- OPERATING FORCE: 700gf-cm MAX.
- CONTACT RATING: 150mA, 42V DC (SWITCHING)
200mA, 42V DC (NON-SWITCHING)
- CONTACT RESISTANCE: 80m Ω MAX.
- INSULATION RESISTANCE: 100M Ω MIN @ 250VDC
- DIELECTRIC STRENGTH: 250VAC 1 MIN.
- LIFE: 10,000 STEPS
- OPERATING TEMPERATURE: -60°C to 125°C
- ▲ 11. PACKAGING: 50 PCS TUBE
- ▲ 12. ▲ DENOTES CRITICAL PARAMETER

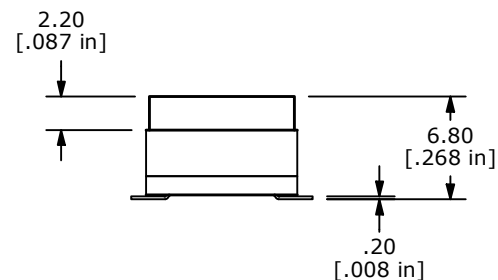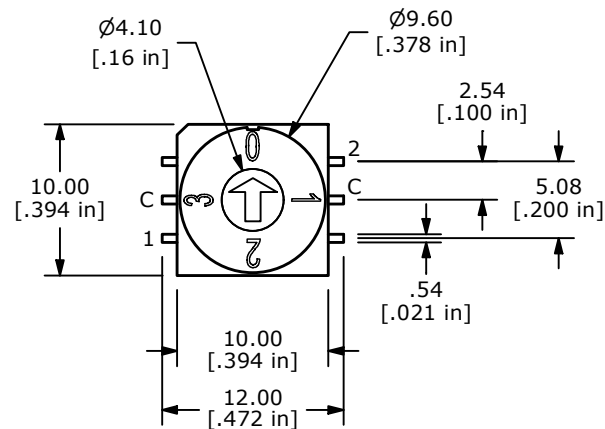

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-102230	Release	09/14/23	MW	TITLE RDTAR04S1T				100125644
					SCALE	DATE	DR	DWG	REV
					2:1	9/12/2023	MW	U200059	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED