



PANEL THICKNESS	(X) DIMENSION
0.75 TO 1.25	23.3
1.25 TO 2.00	23.6
2.00 TO 3.00	23.9

SUGGESTED PANEL CUTOUT


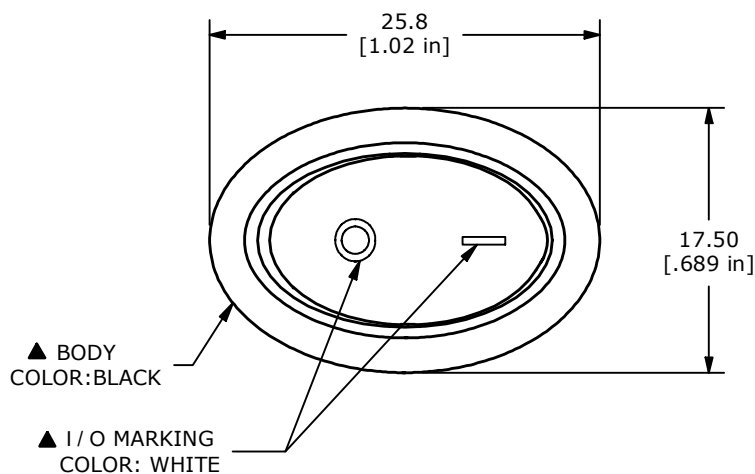


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
OFF	NONE	ON
OPEN	N/A	2-1



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NOS. FOR REF. ONLY
- ▲ 4. RATINGS: ANSI/UL 61058-1 AND
CAN/CSA C22.2 NO.61058-1 (E194579):
16A 125VAC [UR, cUR]
10A 250VAC [UR, cUR]
1/3 HP 125/250VAC [UR, cUR]
5. CONTACT MATERIAL: SILVER ALLOY CLAD COPPER
6. CONTACT RESISTANCE: 35m Ω MAX. @ 50VAC INITIAL
7. INSULATION RESISTANCE: 100M Ω MIN. @ 500VDC
- ▲ 8. DIELECTRIC STRENGTH: 1,500 VAC FOR 1 MINUTE
9. ELECTRICAL LIFE: 10,000 CYCLES [UR, cUR]
10. TEMPERATURE: 0°C TO 105°C [UR, cUR]
- ▲ 11. LAMP VOLTAGE: 12V
12. ▲ DENOTES CRITICAL PARAMETER

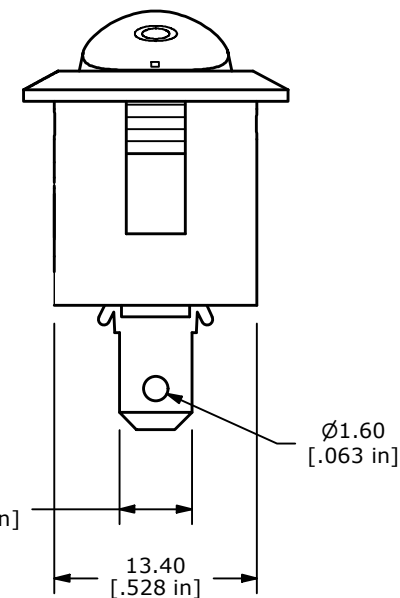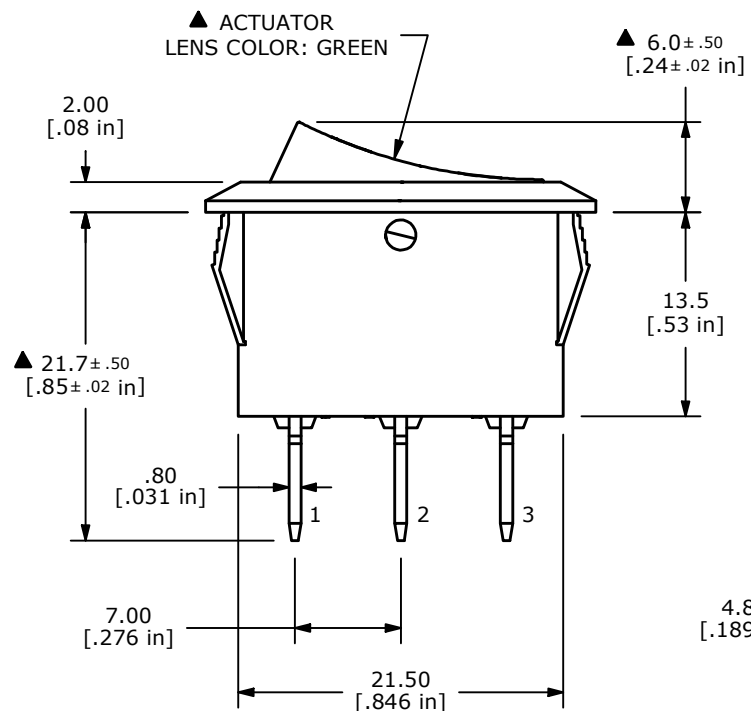

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-102121	SWITCH FUNCTION POS. 3 2-1 WAS 2-1,2-3	07/24/23	JS	TITLE RE111C1021-134				100125136
A	ECO-102104	RELEASE	07/19/23	JS					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV
					2:1	7/13/2023	JS	38-RE111C1021134	B