


SUGGESTED PANEL CUTOUT

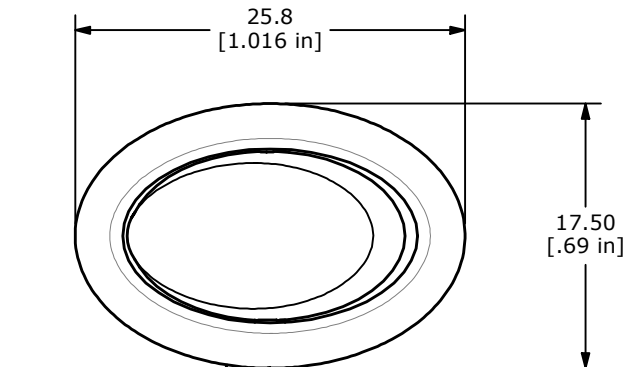
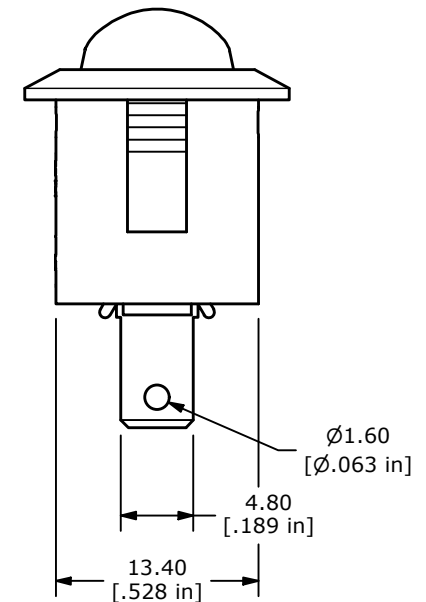
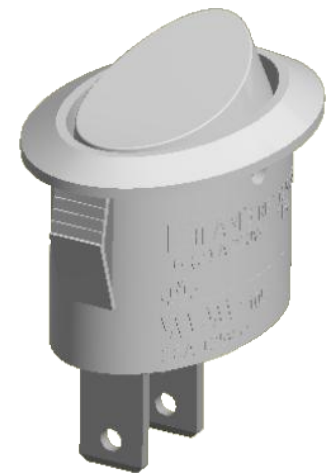
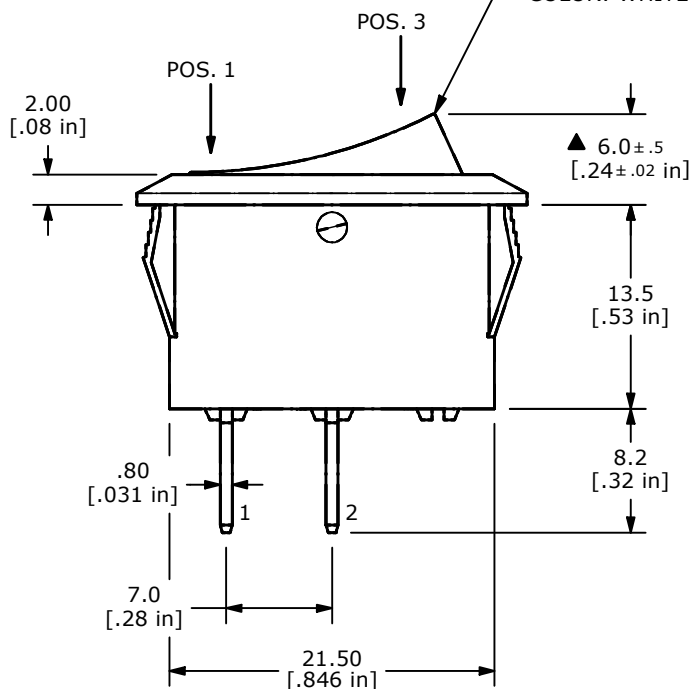
PANEL THICKNESS	(X)
0.75 TO 1.25	23.3
1.25 TO 2.00	23.6
2.00 TO 3.00	23.9

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
OFF	N/A	ON
OPEN	N/A	2-1



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NOS. FOR REF. ONLY
- ▲ 4. RATINGS: ANSI/UL 1054 AND CAN/CSA C22.2 NO.55 (E194579):
16A 125VAC [UR, cUR]
10A 250VAC [UR, cUR]
1/3 HP 125/250VAC [UR, cUR]
EN 61058-1:2002:
10(4)A 250V~ μ 1E4 T125/55 [ENEC14]
10(2)A 250V~ μ 5E4 T85/55 [ENEC14]
- ▲ 5. CONTACT MATERIAL: SILVER ALLOY CLAD COPPER
6. CONTACT RESISTANCE: 35m Ω MAX. @ 50VAC INITIAL
7. INSULATION RESISTANCE: 100M Ω MIN. @ 500VDC
8. DIELECTRIC STRENGTH: 1,500 VAC FOR 1 MINUTE
9. ELECTRICAL LIFE: 6,000 CYCLES [UR, cUR]
10,000 CYCLES [ENEC14: 10(4)A 250V~]
50,000 CYCLES [ENEC14: 10(2)A 250V~]
10. TEMPERATURE: -20°C to 105°C [UR, cUR]
-20°C to 125°C [ENEC14: 10(4)A 250V~]
-20°C to 85°C [ENEC14: 10(2)A 250V~]
11. ▲ DENOTES CRITICAL PARAMETER

▲ BODY
COLOR: WHITE▲ ACTUATOR
COLOR: WHITE

E-SWITCH®

OBJECT ID
000001499

A	24748	RELEASE	2/19/21	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE RE111C2200

SCALE
2:1DATE
2/19/2021DR
MWDWG
38-RE111C2200REV
A