



PANEL THICKNESS	(X)
0.75 TO 1.25	23.3
1.25 TO 2.00	23.6
2.00 TO 3.00	23.9

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
OFF	N/A	ON
OPEN	N/A	2-1





NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4  
X.XX = ± 0.25
3. TERMINAL NOS. FOR REF. ONLY
- ▲ 4. RATINGS: ANSI/UL 1054 AND CAN/CSA C22.2 NO.55 (E194579):  
16A 125VAC [UR, cUR]  
10A 250VAC [UR, cUR]  
1/3 HP 125/250VAC [UR, cUR]  
EN 61058-1:2002:  
10(4)A 250V~ μ 1E4 T125/55 [ENEC14]  
10(2)A 250V~ μ 5E4 T85/55 [ENEC14]
- ▲ 5. CONTACT MATERIAL: SILVER ALLOY CLAD COPPER
6. CONTACT RESISTANCE: 35mΩ MAX. @ 50VAC INITIAL
7. INSULATION RESISTANCE: 100MΩ MIN. @ 500VDC
8. DIELECTRIC STRENGTH: 1,500 VAC FOR 1 MINUTE
9. ELECTRICAL LIFE: 6,000 CYCLES [UR, cUR]  
10,000 CYCLES [ENEC14: 10(4)A 250V~]  
50,000 CYCLES [ENEC14: 10(2)A 250V~]
10. TEMPERATURE: -20°C to 105°C [UR, cUR]  
-20°C to 125°C [ENEC14: 10(4)A 250V~]  
-20°C to 85°C [ENEC14: 10(2)A 250V~]
11. ▲ DENOTES CRITICAL PARAMETER

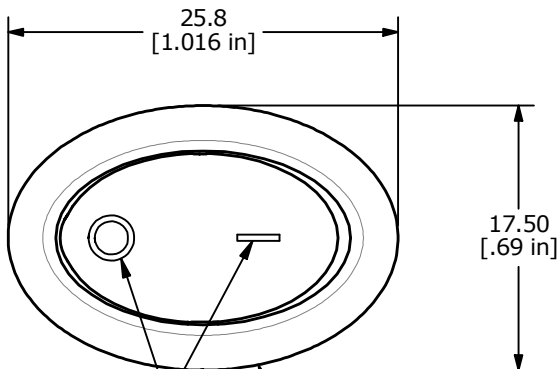

▲ I/O MARKING COLOR: WHITE  
▲ BODY COLOR: BLACK

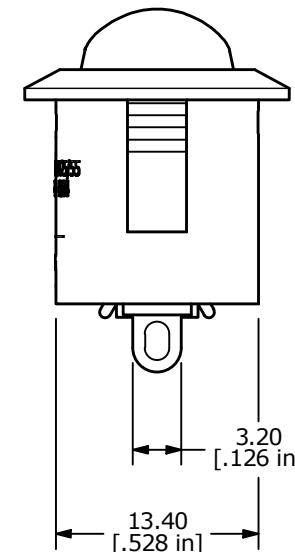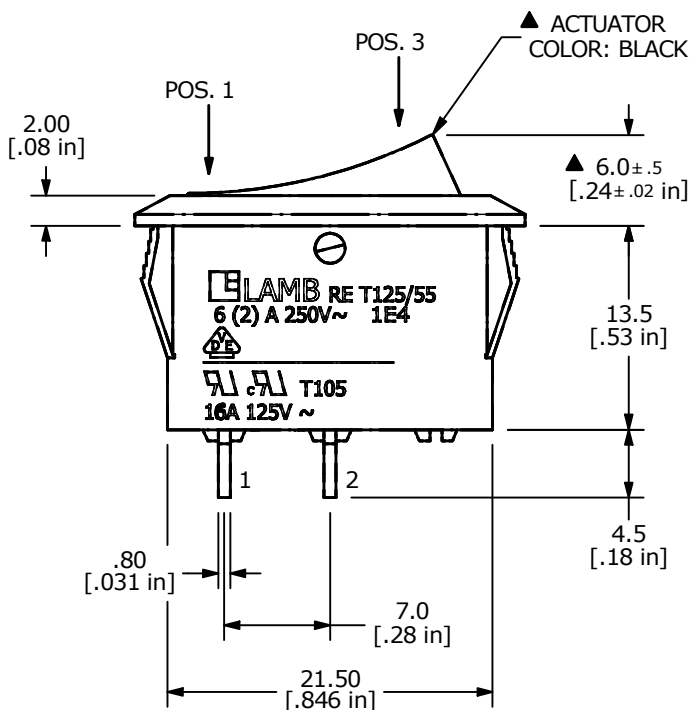

A	24713	RELEASE	2/2/21	MW
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE	RE151C1121			
SCALE	DATE	DR	DWG	REV
2:1	2/2/2021	MW	38-RE151C1121	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED