


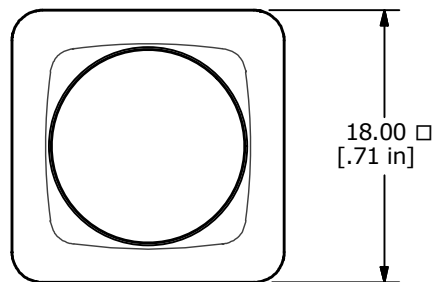


PANEL MOUNTING

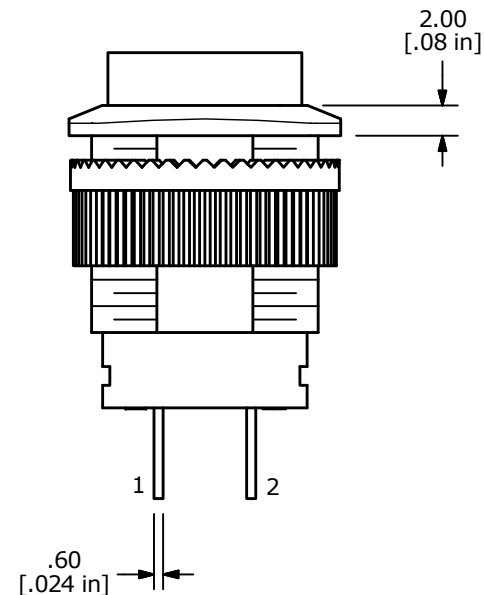

CIRCUIT: SPST LATCHING

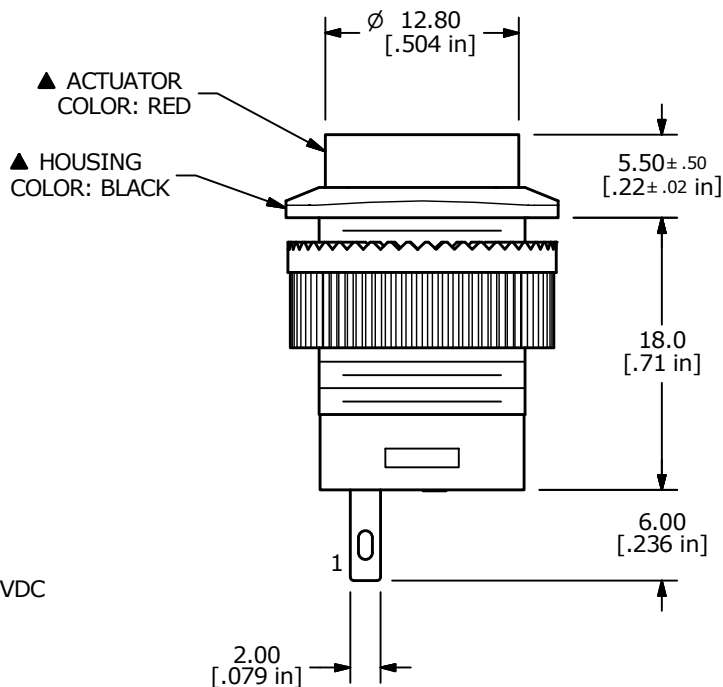

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CIRCUIT: SPST OFF - ON
- ▲ 5. CONTACT RATING: 3A @ 125VAC, 1.5A @ 250VAC
6. ELECTRIC LIFE: 6,000 CYCLES AT FULL LOAD MIN.
7. CONTACT RESISTANCE: 50 MILLI-OHM MAX. (INITIAL)
8. INSULATION RESISTANCE: 100 MEGA-OHM MIN. @ 500VDC
9. DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE.
- ▲ 10. LED COLOR: NONE
11. OPERATING TEMPERATURE: -0°C to +65°C.
12. PANEL THICKNESS RANGE: 7.0 mm MAX.
13. ▲ DENOTES CRITICAL PARAMETER.
14. 2011/65/EU (ROHS) COMPLIANT
15. HARDWARE INCLUDED: MOUNTING NUT



E	24172	add Cap tolerance	1/20/20	MW
D	19613	DRAWING UPDATE	1/20/11	BGL
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE RP3508BBLKREDNNS				
SCALE	DATE	DR	DWG	REV
2 : 1	1/21/2011	BGL	F130417	E

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED