



- NOTE:**
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERMINAL NUMBERS FOR REF ONLY
 4. CIRCUIT: SPST OFF-MOMENTARY ON
 5. CONTACT MATERIAL: Gold over SILVER
 - ▲ 6. RATING: 125mA @ 125 VAC
100mA @ 50 VDC
 7. ELECTRIC LIFE: 500,000 CYCLES AT FULL LOAD
 8. CONTACT RESISTANCE: 50 milli-OHM max. (INITIAL)
 9. INSULATION RESISTANCE: 1,000 MEGA-OHM min. @ 500VDC.
 10. DIELECTRIC STRENGTH: 1,000 VAC rms.
 11. OPERATING FORCE: 350 gf +/- 150 gf
 12. OPERATING TEMPERATURE: -30°C TO +85°C.
 13. CONTACT BOUNCE: 10ms MAX.
 - ▲ 14. TRAVEL: 1.5mm
 15. PANEL THICKNESS RANGE: 1.5 - 4.0 mm.
 16. ▲ DENOTES CRITICAL PARAMETER.
 17. MAX. MOUNTING TORQUE: 0.5 Nm APPLIED TO THE NUT
 - ▲ 18. HARDWARE INCLUDED:
 - 1. T081101 LOCK WASHER (1)
 - 2. T081102 HEX NUT (1)
 - 3. T081100 RUBBER SEAL (1)
 19. SEAL RATING: IP67 AT FRONT PANEL

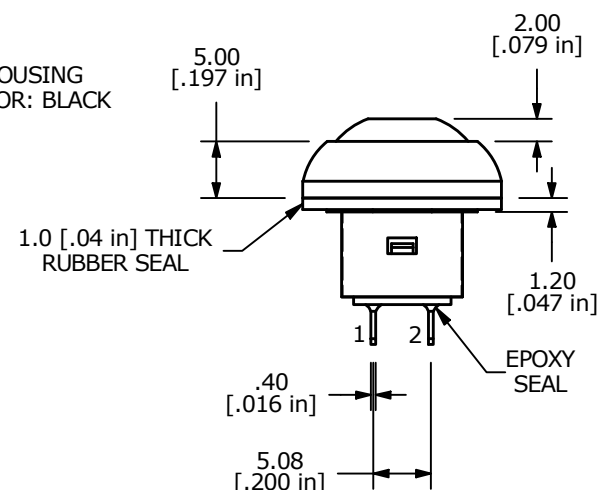

REV	ECO NO	DESCRIPTION	DATE	BY
E	ECO-100344	MAX MOUNTING TORQUE 0.5 Nm	09/16/21	JS

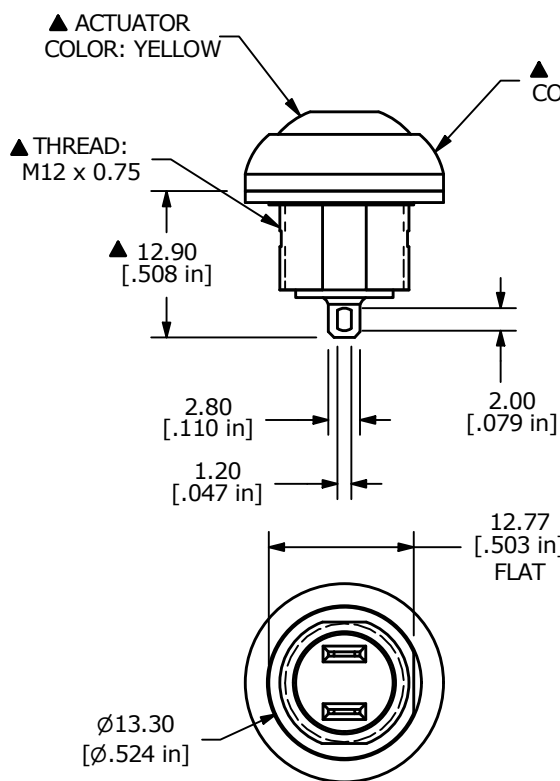

OBJECT ID
000022767

TITLE RP8100B2M1CEBLKYELNIL				
SCALE 3:2	DATE 12/23/2008	DR BLR	DWG ST081035	REV E

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED