



LED PARAMETER	FORWARD CURRENT	FORWARD VOLTAGE @ 20mA	LUMINOUS INTENSITY
UNITS	mA	V	mcd
GREEN	20	2.2 - 2.7	130

NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NUMBERS FOR REF ONLY
- CIRCUIT: SPST OFF-(ON) MOMENTARY
- CONTACT MATERIAL: GOLD OVER SILVER
- RATING: 500mA @ 48 VAC
200mA @ 50 VDC
200mA @ 250 VAC
- ELECTRIC LIFE: 500,000 CYCLES AT FULL LOAD
- CONTACT RESISTANCE: 50 MILLI-OHM MAX. (INITIAL)
- INSULATION RESISTANCE: 1,000 MEGA-OHM MIN. @ 500VDC
- DIELECTRIC STRENGTH: 1,500 VAC FOR 1 MINUTE
- OPERATING FORCE: 350gf ± 150 gf
- OPERATING TEMPERATURE: -30°C to +85°C
- CONTACT BOUNCE: 10ms MAX.
- TRAVEL: 1.5 ± 0.25 mm
- PANEL THICKNESS RANGE: 1.5 - 4.0mm
- ▲ DENOTES CRITICAL PARAMETER.
- MAX TORQUE APPLIED TO MOUNTING NUT: 1.5Nm
- HARDWARE INCLUDED:
 - T081101 LOCK WASHER (1)
 - T081102 HEX NUT (1)
 - T081103 O-RING (1)
- SEAL RATING: IP67 AT THE FRONT PANEL

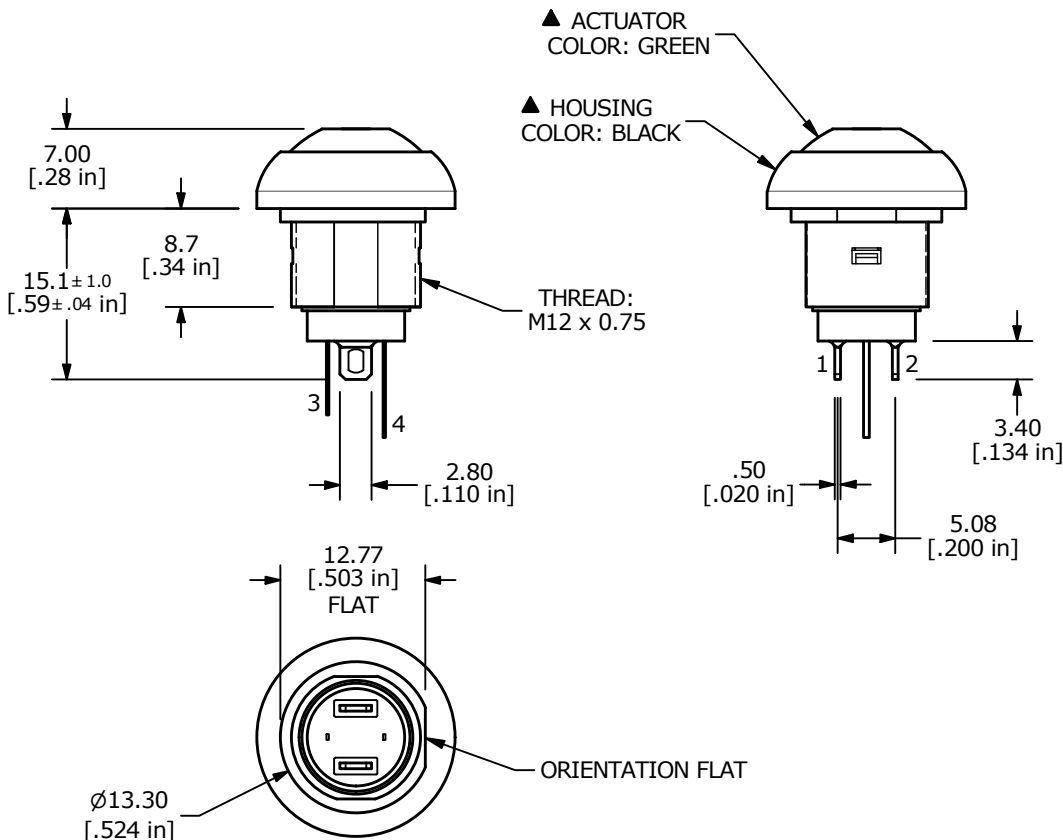

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®				OBJECT ID
A	ECO-101747	Release	03/17/23	MW	TITLE RP8300B2M1CEBLKGRNGRN				100123796
					SCALE	DATE	DR	DWG	REV
					3:2	3/16/2023	MW	ST083010	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED