


PANEL CUTOUT

| PANEL THICKNESS | (X) DIM. |
|-----------------|----------|
| 0.75 - 1.25mm   | 20.2mm   |
| 1.25 - 2.00mm   | 20.4mm   |
| 2.00 - 3.00mm   | 20.6mm   |

| SWITCH FUNCTION |        |
|-----------------|--------|
| POS. 1          | POS. 2 |
|                 |        |
| OFF             | ON     |
| OPEN            | 2-1    |



Ø23.00  
[.906 in]

▲ LENS COLOR:  
TRANSPARENT AMBER



▲ ACTUATOR  
COLOR: BLACK

▲ BODY  
COLOR: BLACK



## NOTE:

1. DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X =  $\pm 0.4$   
X.XX =  $\pm 0.25$
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
- ▲ 5. CONTACT RATING: ANSI/UL 1054 CAN/USA C22.2 NO. 55 (E194579):  
10A @ 125VAC [UR, cUR]
6. CONTACT RESISTANCE: 35mΩ MAX. @ 50VAC
7. INSULATION RESISTANCE: 100MΩ MIN. @ 500VAC
8. DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE
9. ELECTRICAL LIFE: 6,000 CYCLES [UR, cUR]
10. OPERATING TEMPERATURE: -20°C to 105°C [UR, cUR]
11. ▲ DENOTES CRITICAL PARAMETER
- ▲ 12. ILLUMINATION VOLTAGE: 12V

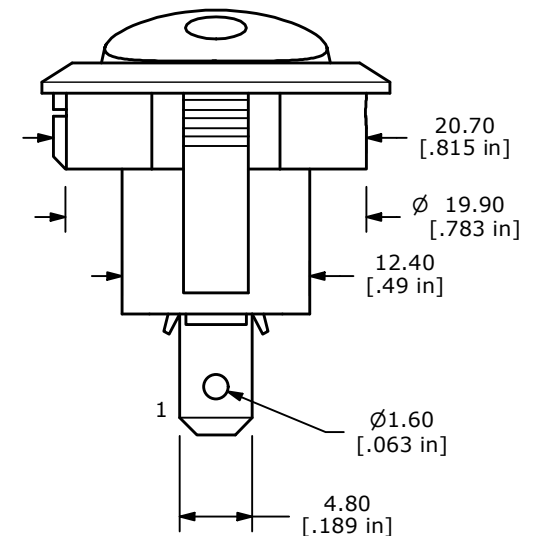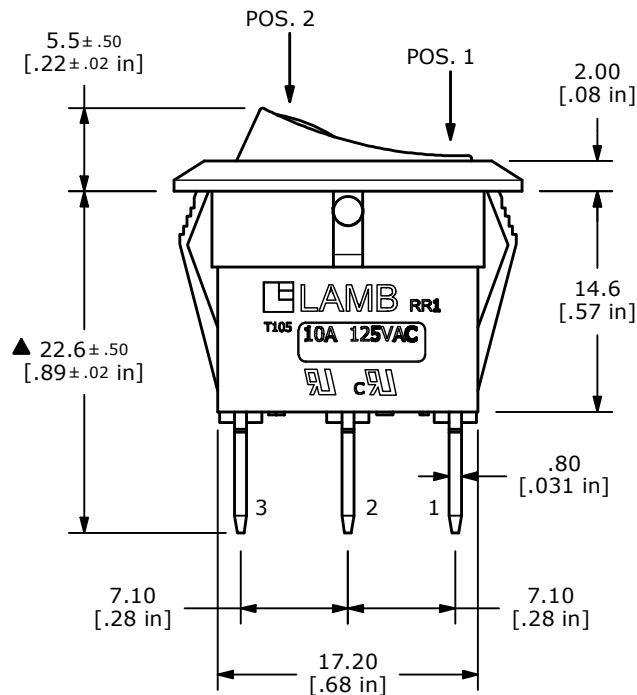

| REV | ECO NO     | DESCRIPTION        | DATE     | BY | E-SWITCH®            |          |    |                  | OBJECT ID |
|-----|------------|--------------------|----------|----|----------------------|----------|----|------------------|-----------|
| B   | ECO-103714 | REMOVE ENEC RATING | 12/01/25 | JS | TITLE RR11131100-224 |          |    |                  | 000001505 |
|     |            |                    |          |    | SCALE                | DATE     | DR | DWG              | REV       |
|     |            |                    |          |    | 2:1                  | 3/1/2021 | MW | 38-RR11131100224 | B         |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO  
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED