



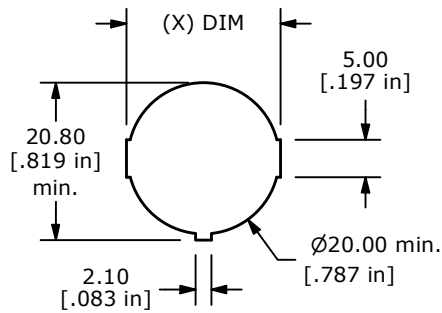

PANEL CUTOUT

PANEL THICKNESS	(X) DIM.
0.75 to 1.25	20.2mm
1.25 to 2.00	20.4mm
2.00 to 3.00	20.6mm

SWITCH FUNCTION	
POS. 1	POS. 2
OFF	ON
OPEN	2-1




CIRCUIT: SPST

NOTE:



- DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: SILVER
- CONTACT RATING: ANSI/UL 1054 CAN/USA C22.2 NO. 55 (E194579):
16A @ 125VAC [UR, cUR]
10A @ 250VAC [UR, cUR]
1/3 HP 125/250VAC [UR, cUR]
- CONTACT RESISTANCE: 35m Ω MAX. @ 50VAC
- INSULATION RESISTANCE: 100M Ω MIN. @ 500VAC
- DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE
- ELECTRICAL LIFE: 6,000 CYCLES [UR, cUR]
- OPERATING TEMP.: -20°C to 105°C [UR, cUR]
- ▲ DENOTES CRITICAL PARAMETER
- ILLUMINATION VOLTAGE: N/A

Ø23.00
[.906 in]

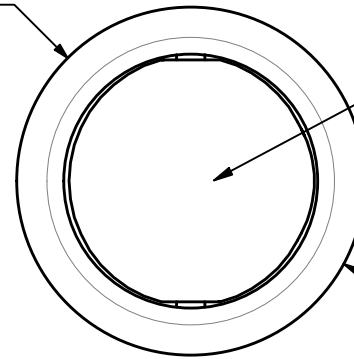

▲ ACTUATOR
COLOR: BLACK

▲ BODY
COLOR: BLACK

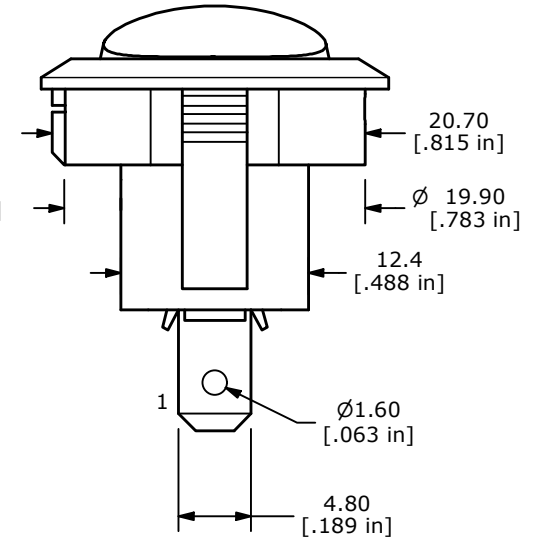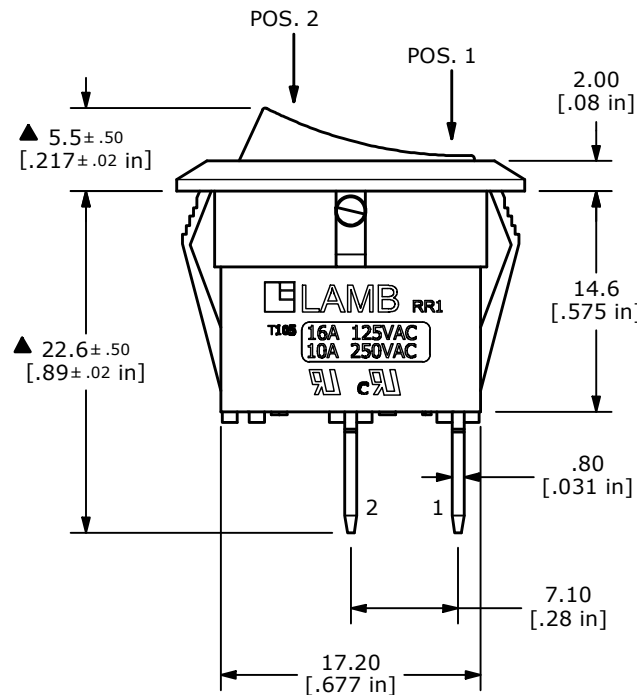

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-103714	REMOVE ENEC RATING	12/01/25	JS	TITLE RR111C1100				100127981
					SCALE	DATE	DR	DWG	REV
					2:1	7/29/2024	MW	38-RR111C1100	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED