
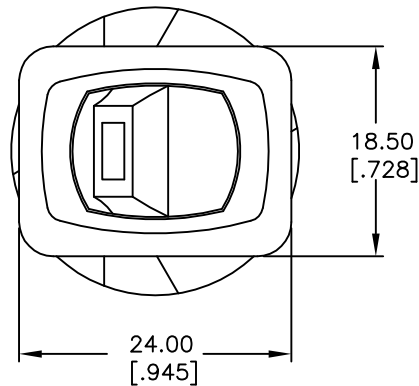
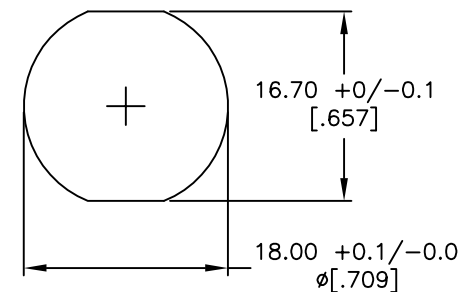

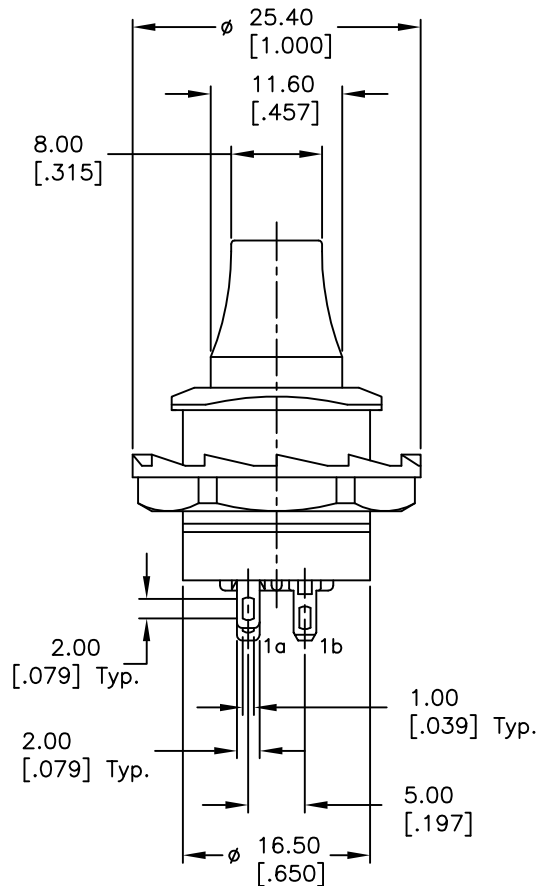


SECTION A-A

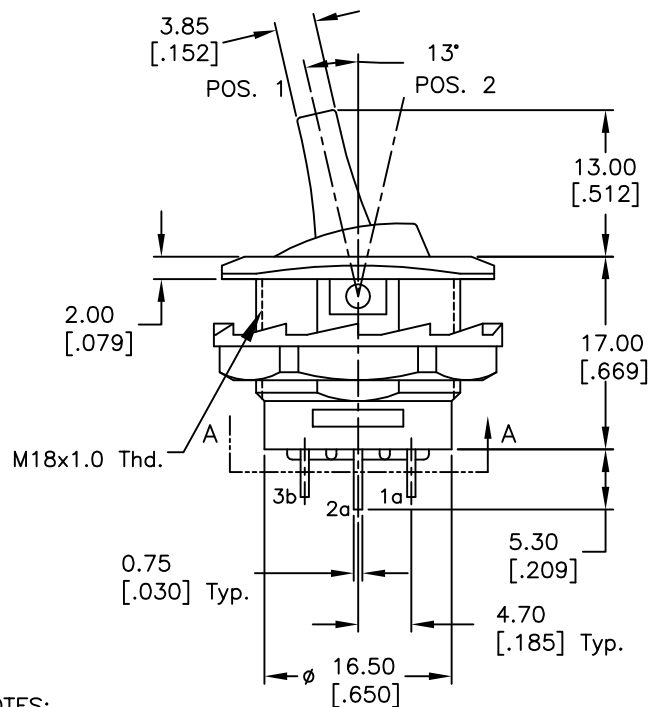

RECOMMEND PANEL MOUNTING

CIRCUIT: 4P; SPST
CONTACT CONFIGURATION

SWITCH FUNCTION

POS. 1	POS. 2
ON	OFF
2a-1a	OPEN

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: 0.0=±0.4
0.00=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RESISTANCE: 50m ohm max.
5. INSULATION RESISTANCE: DC 500V, 100M ohm min.
6. DIELECTRIC STRENGTH: AC 1500V 1 minute

B	22635	UPDATED CIRCUIT 3VDC TO 1.8VDC	12/8/16	MJR
A	10519	RELEASED FOR PRODUCTION	2/8/00	MM
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE

RR3405AL-RED

SCALE

1.5:1

DATE

2/8/00

DR

MM

DWG

F030007

REV

B