



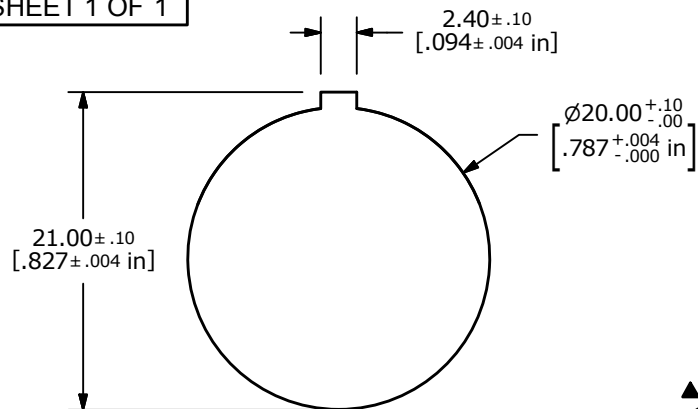




PANEL CUTOUT

SWITCH FUNCTION	
POS. 1	POS. 2
ON	OFF
1-2	OPEN



NOTE:

1. DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
5. CONTACT RATING: 20A 125VAC T65 [UL, cUL]
12A 250VAC T65 [UL, cUL]
10(4)A 250V~ 5E4 T125/55 [ENEC10, VDE]
6. CONTACT RESISTANCE: 35mΩ MAX. @ 50VAC
7. INSULATION RESISTANCE: 100MΩ MIN. @ 500VAC
8. DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE
9. ELECTRICAL LIFE: 6,000 CYCLES [UR, cUR]
50,000 CYCLES [ENEC10, VDE: 10(4)A 250V~]
10. OPERATING TEMPERATURE: -20°C TO 65°C [UR, cUR]
-20°C TO 125°C [ENEC10, VDE: 10(4)A 250V~]
11. ▲ DENOTES CRITICAL PARAMETER
12. 2002/95/EC (ROHS) COMPLIANT

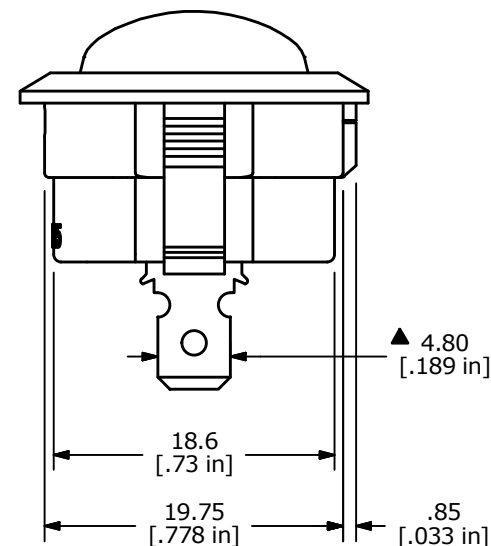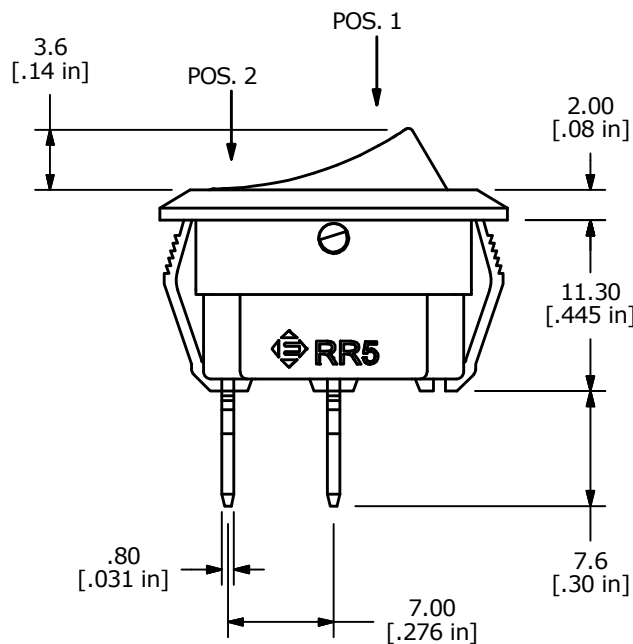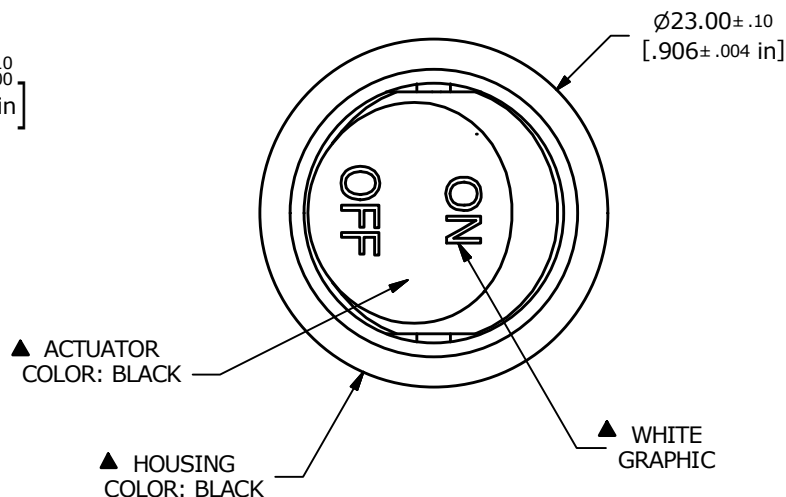

TITLE RR511D1123

A	22078	RELEASE FOR PRODUCTION	12/8/15	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 2:1	DATE 12/8/2015	DR MW	DWG 14-RR511D1123	REV A
--------------	-------------------	----------	----------------------	----------