



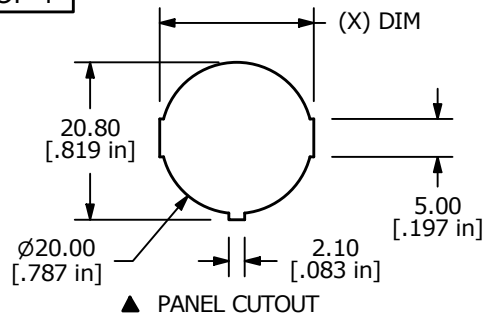

PANEL THICKNESS	(X) DIM.
0.75 TO 1.25	20.2mm
1.25 TO 2.00	20.4mm
2.00 TO 3.00	20.6mm

▲ SWITCH FUNCTION





POS. 1	POS. 2
OFF	ON
OPEN	3B-4B, 1A-2A



CIRCUIT: DPST
FUNCTIONS
▲ OFF - ON

NOTE:

- DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: SILVER
- CONTACT RATING: 10A 125VAC [UL, cUL]
- CONTACT RESISTANCE: 35m Ω MAX. @ 50VAC
- INSULATION RESISTANCE: 100M Ω MIN. @ 500VAC
- DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE
- ELECTRICAL LIFE: 6,000 CYCLES [UR, cUR]
- OPERATING TEMPERATURE: -20°C TO 105°C [UR, cUR]
- ▲ DENOTES CRITICAL PARAMETER
- ▲ LENS COLOR, GREEN
- ▲ LAMP VOLTAGE, 12V

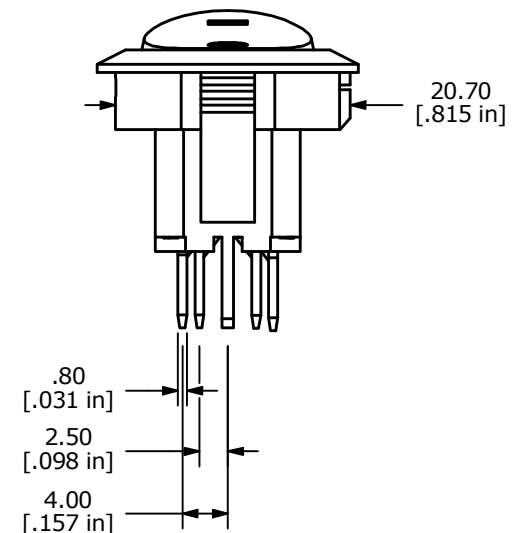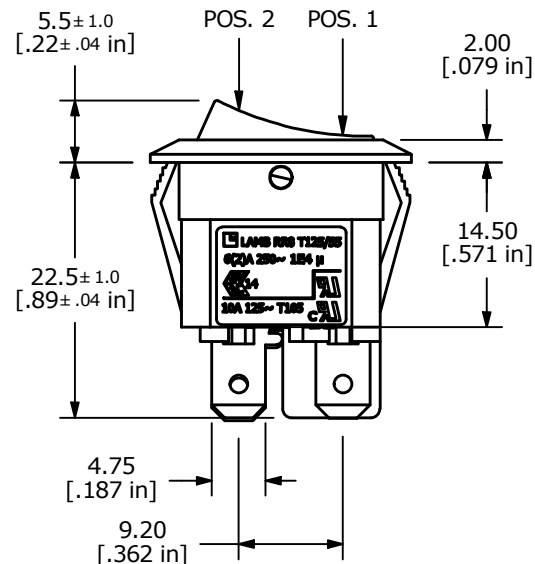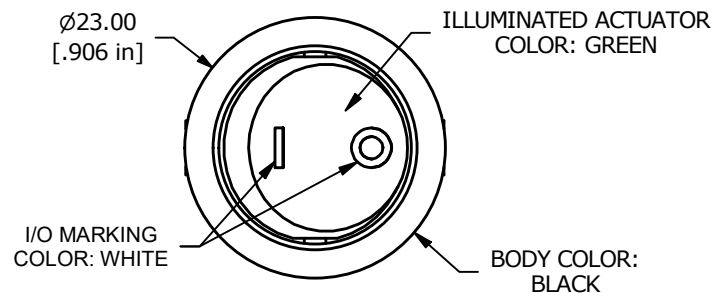

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
D	ECO-101269	PRINT UPDATED	09/23/22	JS	TITLE RR8123102R-134				100089105
					SCALE 3:2	DATE 3/8/2012	DR BGL	DWG 38-RR8123102R134	REV D

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED