



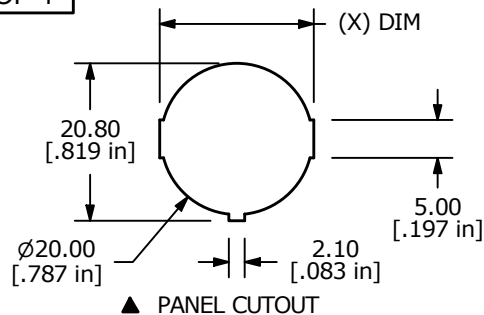

| PANEL THICKNESS | (X) DIM. |
|-----------------|----------|
| 0.75 TO 1.25    | 20.2mm   |
| 1.25 TO 2.00    | 20.4mm   |
| 2.00 TO 3.00    | 20.6mm   |





| SWITCH FUNCTION |                 |
|-----------------|-----------------|
| POS. 1          | POS. 2          |
|                 |                 |
| OFF             | ON              |
| OPEN            | 3B-4B,<br>1A-2A |



CIRCUIT: DPST  
FUNCTIONS  
▲ OFF - ON

## NOTE:

1. DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X =  $\pm 0.4$   
X.XX =  $\pm 0.25$
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
5. CONTACT RATING: 10A 125VAC [UR, cUR]
6. CONTACT RESISTANCE: 35m $\Omega$  MAX. @ 50VAC
7. INSULATION RESISTANCE: 100M $\Omega$  MIN. @ 500VAC
8. DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE
9. ELECTRICAL LIFE: 6,000 CYCLES [UR, cUR]
10. OPERATING TEMPERATURE: -20°C TO 105°C [UR, cUR]
11. ▲ DENOTES CRITICAL PARAMETER

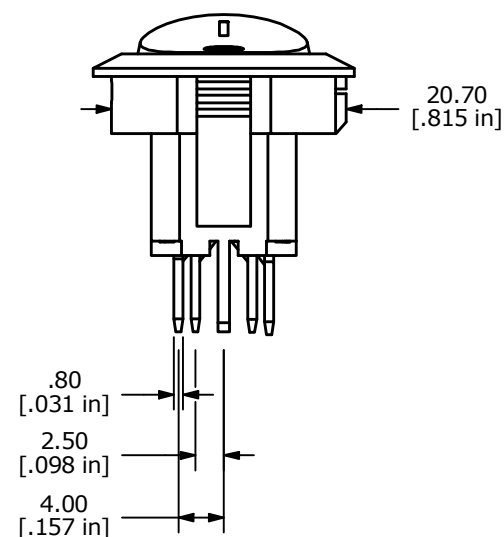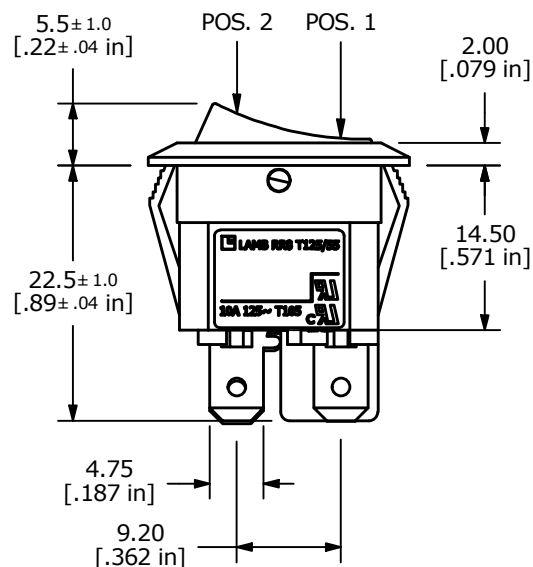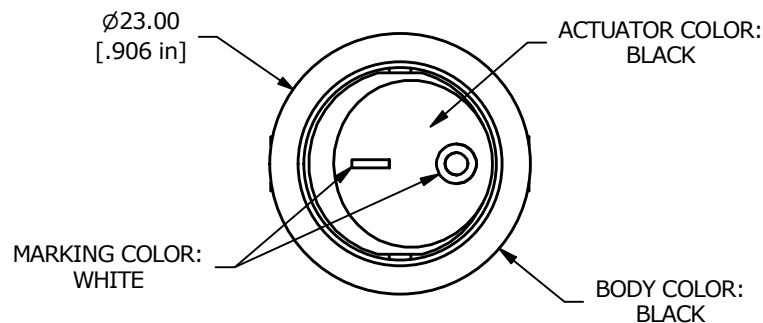

| REV | ECO NO     | DESCRIPTION                     | DATE     | BY | E-SWITCH®        |               |        |                   | OBJECT ID |
|-----|------------|---------------------------------|----------|----|------------------|---------------|--------|-------------------|-----------|
| H   | ECO-100707 | REMOVE VDE/ENEC RATING AND LOGO | 03/09/23 | JS | TITLE RR81231121 |               |        |                   | 000001523 |
|     |            |                                 |          |    | SCALE 3:2        | DATE 3/8/2012 | DR BGL | DWG 38-RR81231121 | REV H     |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED