

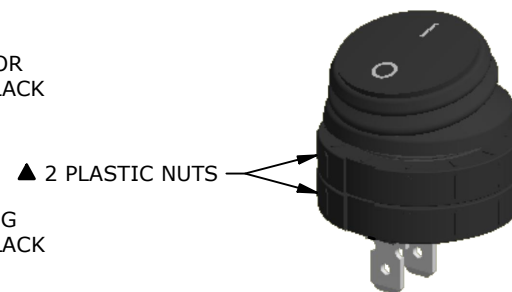
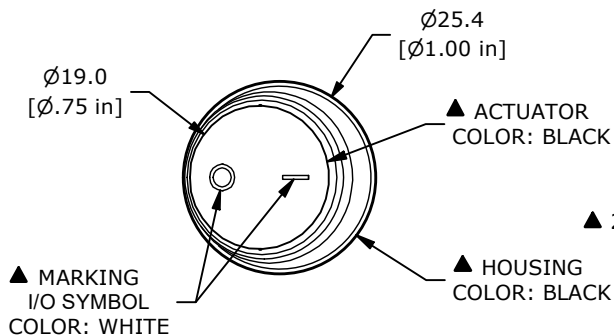


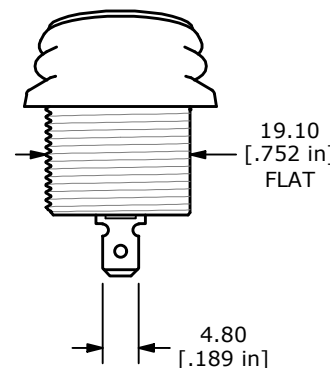


RECOMMENDED PANEL CUTOUT
PANEL THICKNESS: 1.0-3.0mm

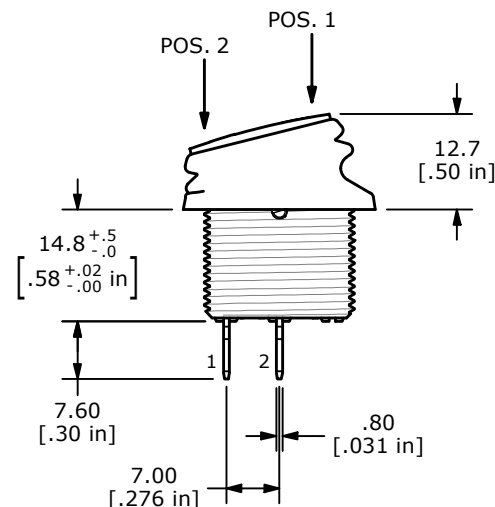

▲ SWITCH FUNCTION

POS. 1	POS. 2
ON	OFF
2-1	OPEN



- NOTE:
- DIMENSIONS IN MM [INCH]
 - GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
 - TERMINAL NUMBERS FOR REF ONLY
 - CONTACT MATERIAL: SILVER PLATED
 - RATING: 16(8)A, 125/250VAC T55
 - CONTACT RESISTANCE: 20mΩ MAX.
 - INSULATION RESISTANCE: 100MΩ MIN. @ 500VAC
 - DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE
 - ELECTRICAL LIFE: 10,000 CYCLES
 - OPERATING TEMPERATURE: -0°C to 55°C
 - ▲ DENOTES CRITICAL PARAMETER
 - ILLUMINATION VOLTAGE: NON-ILLUMINATED
 - INGRESS PROTECTION: IP68
 - HARDWARE INCLUDED: O-RING AND 2 PLASTIC NUTS

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-103503	Print update	07/02/25	MW					100129459
					TITLE RRS20F1ABLKBLKWHT3NP				
					SCALE 1:1	DATE 1/6/2025	DR MW	DWG C620004	REV B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED