

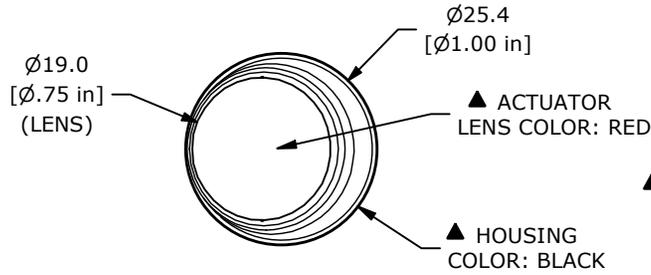

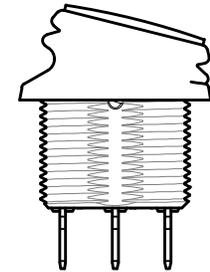
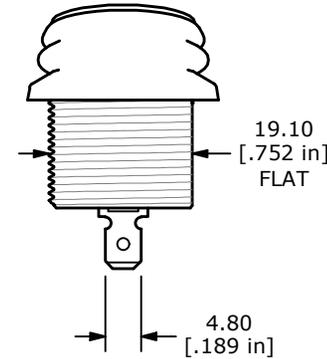


RECOMMENDED PANEL CUTOUT  
PANEL THICKNESS: 1.0-3.0mm

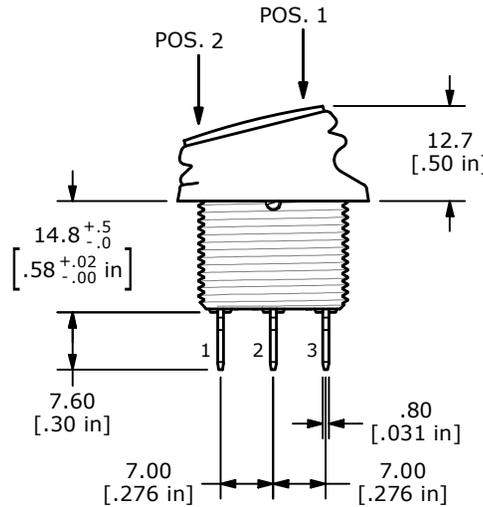

▲ SWITCH FUNCTION

POS. 1	POS. 2
ON	OFF
2-1	OPEN



- NOTE:
- DIMENSIONS IN MM [INCH]
  - GENERAL TOLERANCE: X.X = ±0.4  
X.XX = ±0.25
  - TERMINAL NUMBERS FOR REF ONLY
  - CONTACT MATERIAL: SILVER PLATED
  - RATING: 16(8)A, 125/250VAC T55
  - CONTACT RESISTANCE: 20mΩ MAX.
  - INSULATION RESISTANCE: 100MΩ MIN. @ 500VAC
  - DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE
  - ELECTRICAL LIFE: 10,000 CYCLES
  - OPERATING TEMPERATURE: -0°C to 55°C
  - ▲ DENOTES CRITICAL PARAMETER
  - ILLUMINATION VOLTAGE: 125V
  - INGRESS PROTECTION: IP68
  - HARDWARE INCLUDED: O-RING AND 2 PLASTIC NUTS

REV	ECO NO	DESCRIPTION	DATE	BY
B	ECO-103503	Print update	07/02/25	MW



OBJECT ID  
100129294

TITLE RRS20F1ABLKREDNN1P				
SCALE	DATE	DR	DWG	REV
1:1	1/6/2025	MW	C620001	B