
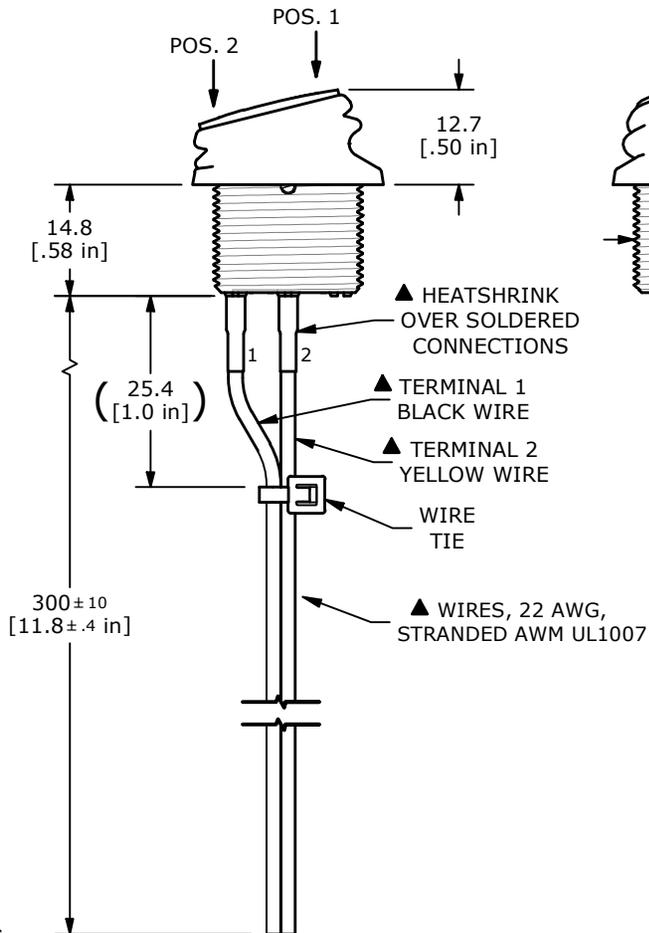


RECOMMENDED PANEL CUTOUT  
 PANEL THICKNESS: 1.0-3.0mm

SWITCH FUNCTION	
POS. 1	POS. 2
ON	OFF
2-1	OPEN



- NOTE:
- DIMENSIONS IN MM [INCH]
  - GENERAL TOLERANCE: X.X = ±0.4  
X.XX = ±0.25
  - TERMINAL NUMBERS FOR REF ONLY
  - CONTACT MATERIAL: SILVER PLATED
  - RATING: 16(8)A, 125/250VAC T55
  - CONTACT RESISTANCE: 20mΩ MAX.
  - INSULATION RESISTANCE: 100MΩ MIN. @ 500VAC
  - DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE
  - ELECTRICAL LIFE: 10,000 CYCLES
  - OPERATING TEMPERATURE: -0°C to 55°C
  - ▲ DENOTES CRITICAL PARAMETER
  - ILLUMINATION VOLTAGE: NON-ILLUMINATED
  - INGRESS PROTECTION: IP68
  - HARDWARE INCLUDED: O-RING AND 2 PLASTIC NUTS

REV	ECO NO	DESCRIPTION	DATE	BY
A	ECO-103548	Release	07/24/25	MW



OBJECT ID  
100130663

TITLE RRS20W1ABLKBLKWHT3NP				
SCALE 1:1	DATE 7/16/2025	DR MW	DWG C620006	REV A