


PANEL CUT-OUT


SWITCH FUNCTION	
POS. 1	POS. 2
OFF	ON
NONE	1-2



▲ GRAPHIC COLOR:
WHITE



▲ ACTUATOR COLOR:
BLACK

▲ HOUSING COLOR:
BLACK

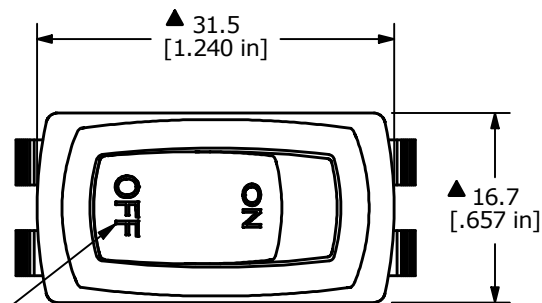

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NOS. FOR REF. ONLY
- ▲ 4. RATING: 20A 125VAC [cURus]
16A 250VAC [cURus]
1/3HP 125/250VAC [cURus]
3/4HP 125/250VAC [cURus]
5. ELECTRICAL LIFE: 10,000 CYCLES MIN.
6. CONTACT RESISTANCE: 20 m Ω MAX.
7. OPERATING TEMP: -20°C TO 65°C [cURus]
-20°C TO 105°C [cURus]
8. DIELECTRIC STRENGTH: >1,000V AC 1MIN
9. INSULATION RESISTANCE: 100 M Ω @ 500VDC
10. ▲ DENOTES CRITICAL PARAMETER.

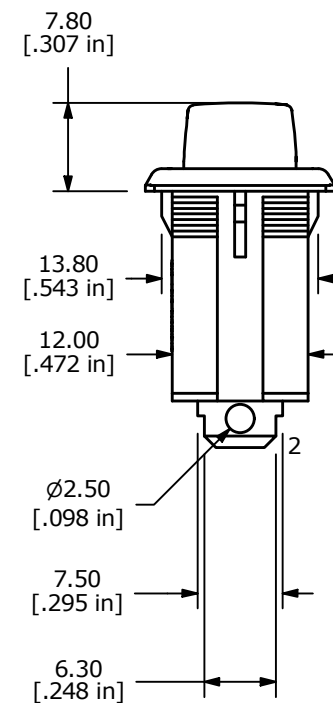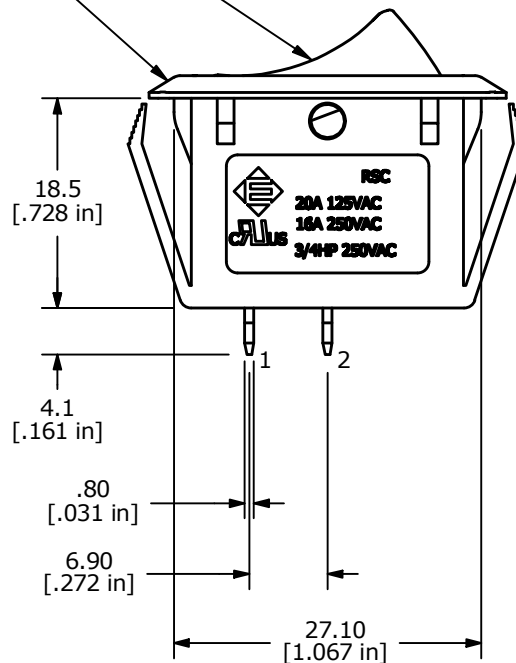

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
C	ECO-100550	REMOVE VDE/ENEC RATING AND LOGO	02/03/22	JS	TITLE RSC1C1D1123				000000338
					SCALE	DATE	DR	DWG	REV
					1.5:1	2/6/2017	MJR	14-RSC1C1D1123	C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED