






SUGGESTED PANEL CUTOUT

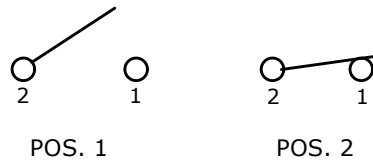

▲ CIRCUIT: SPST
OFF - ON

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
- ▲ 4. RATING: 20A @ 125VAC [cURus]
16A @ 250VAC [cURus]
1/3HP 125/250VAC [cURus]
3/4HP 125/250VAC [cURus]
5. MATERIAL:
CONTACT SURFACE: SILVER PLATED COPPER
CIRCUIT TERMINAL: BRASS ALLOY w/TIN PLATE
6. ELECTRICAL LIFE: 6,000 CYCLES MIN.
7. CONTACT RESISTANCE: 20 mΩ MAX.
8. INSULATION RESISTANCE: 100 MΩ MIN. @ 500VDC
9. OPERATING TEMP: 0°C TO 105°C [cURus]
10. DIELECTRIC STRENGTH: >1,000V AC 1MIN
11. ▲ DENOTES CRITICAL PARAMETER.

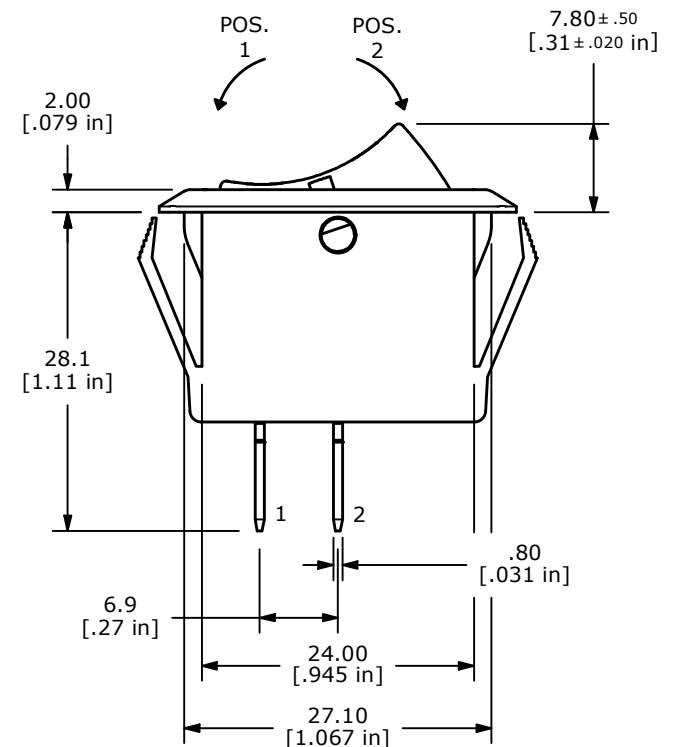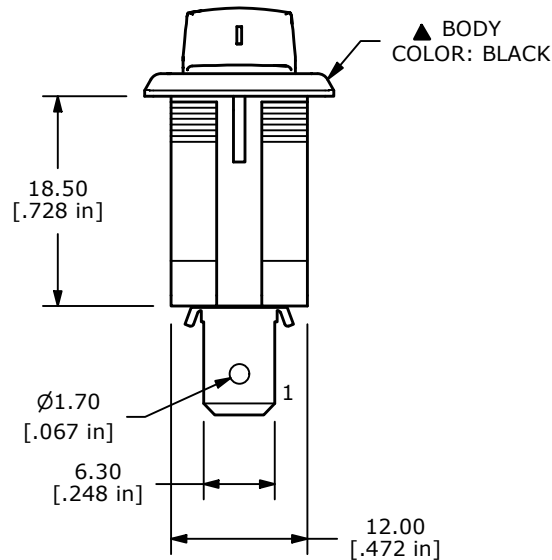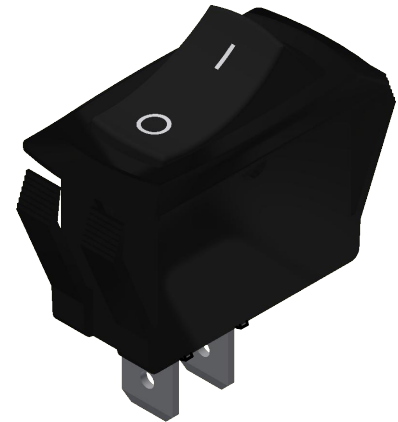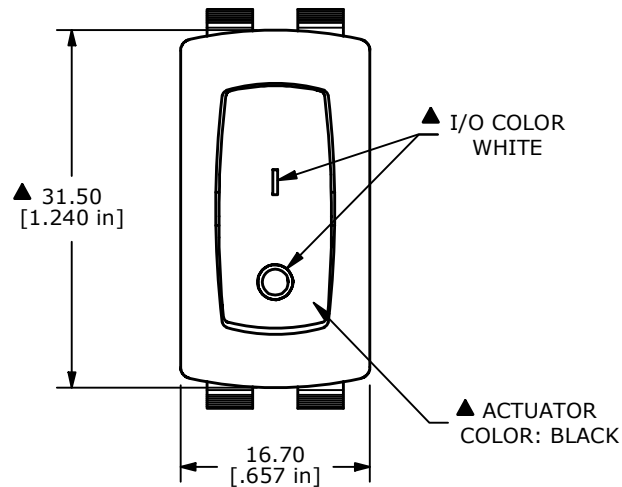

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-102804	RELEASE	06/18/24	JS	TITLE RSC241D1121				100127618
					SCALE	DATE	DR	DWG	REV
					1.5:1	6/11/2024	JS	14-RSC241D1121	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED