

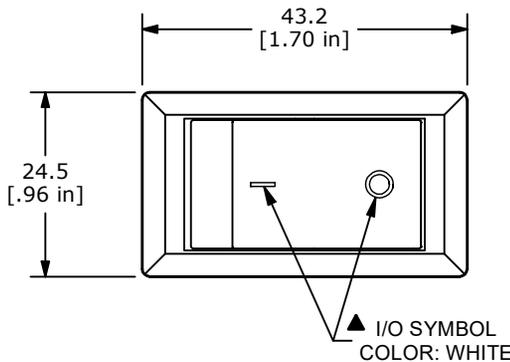
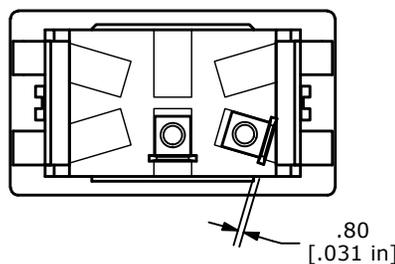
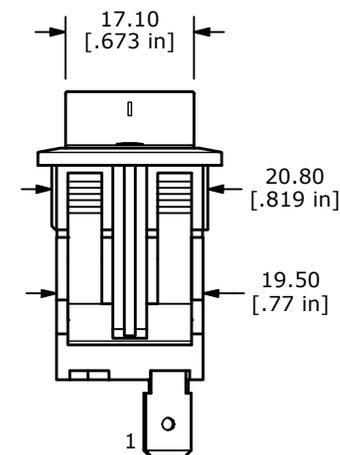


SUGGESTED PANEL CUTOUT

PANEL THICKNESS	(X) +.10mm/-.00mm
1.5 - 2.0 mm	36.8 mm
2.0 - 3.0 mm	37.2 mm
3.0 - 4.0 mm	37.5 mm

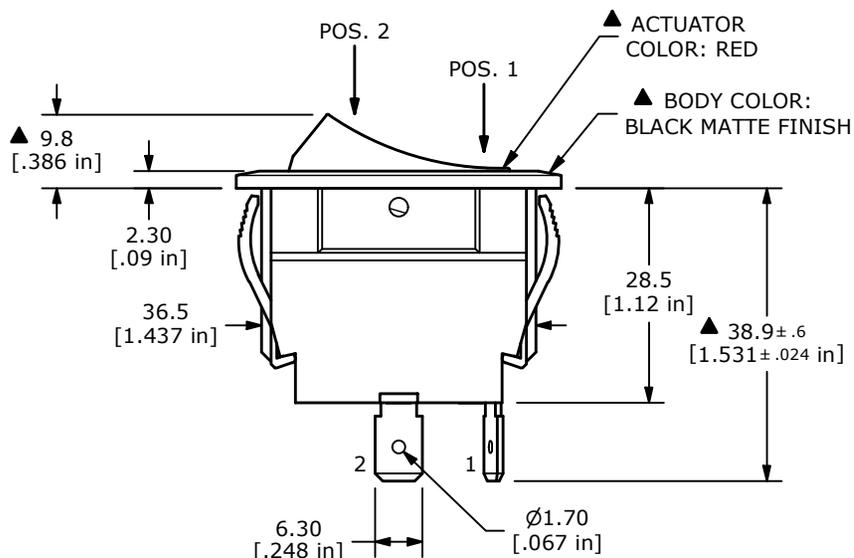

SWITCH FUNCTION	
POS. 2	POS. 1
ON	OFF
2-1	OPEN



NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X ± 0.5
X.XX ± 0.30
- RATINGS: 20A, 125VAC [cURus]
15A, 277VAC [cURus]
2HP, 110-250VAC [cURus]
- CONTACT RESISTANCE: 50 mΩ MAX.
- INSULATION RESISTANCE: 2 MΩ MIN. @ 500VDC
- OPERATING TEMPERATURE: 0°C to +55°C
- ELECTRICAL LIFE: 6,000 CYCLES
- DIELECTRIC STRENGTH: 1,500V FOR 1 MINUTE
- INGRESS PROTECTION: IP54
- ▲ DENOTES CRITICAL PARAMETER

REV	ECO NO	DESCRIPTION	DATE	BY
A	ECO-102264	Release	10/10/23	MW



OBJECT ID
100125758

TITLE RVW41D1921		SCALE 1:1	DATE 9/29/2023	DR MW	DWG 34-RVW41D1921	REV A
---------------------	--	--------------	-------------------	----------	----------------------	----------