
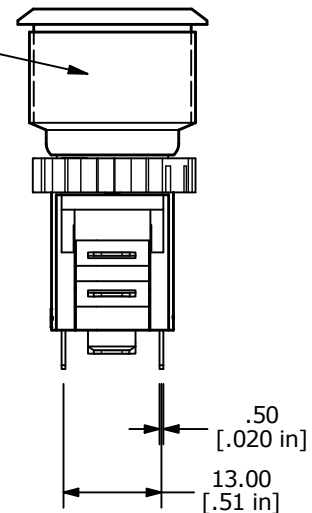
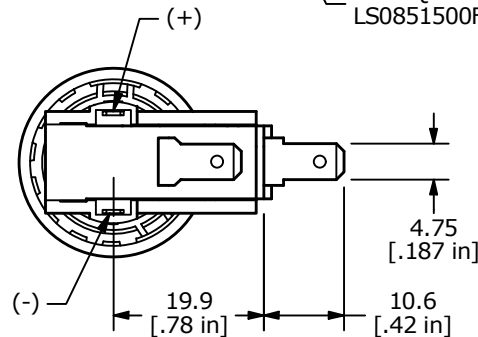
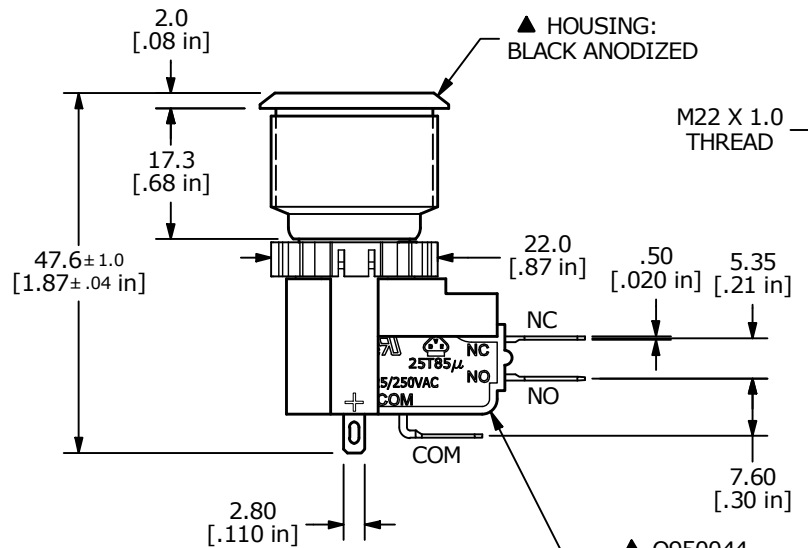


▲ SCHEMATIC  
ON-ON  
SPDT ILLUMINATED

## NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X =  $\pm 0.4$   
X.XX =  $\pm 0.25$
3. RATING: 15A @125/250VAC
- ▲ 4. OPERATING FORCE:  $3.5 \pm 1.5$ N
5. OPERATING TEMP: -25°C to 85°C
6. ELECTRICAL LIFE: 10,000 CYCLES MIN.
7. MECHANICAL LIFE: 1,000,000 CYCLES TYP.
8. INSULATION RESISTANCE: 100 MEGA-OHMS MIN.
9. DIELECTRIC STRENGTH: 1500VAC 1 MINUTE (INITIAL VALUE)
10. CONTACT RESISTANCE: 100 MILLI-OHMS MAX.
11. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 12. LAMP VOLTAGE: 3V
13. TRAVEL: 3.2mm
14. HEX NUT TORQUE: 1-3Nm
15. INGRESS PROTECTION: IP67
16. HARDWARE SUPPLIED: O-RING AND HEXNUT

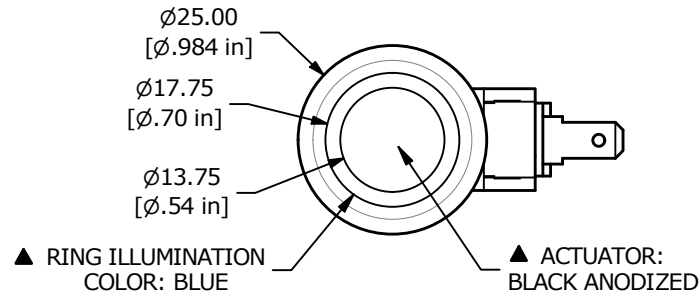

| REV | ECO NO     | DESCRIPTION | DATE     | BY | E-SWITCH®          |            |    |         | OBJECT ID |
|-----|------------|-------------|----------|----|--------------------|------------|----|---------|-----------|
| A   | ECO-100482 | Release     | 10/29/21 | JM | TITLE SAV7F1311341 |            |    |         | 100119896 |
|     |            |             |          |    | SCALE              | DATE       | DR | DWG     | REV       |
|     |            |             |          |    | 1:1                | 10/27/2021 | MW | T957015 | A         |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO  
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED