



RECOMMENDED PANEL CUTOUT
PANEL THICKNESS 1-10mm



WHITE (FORWARD)
(+) ○ — [diode symbol] — ○ (-)
WHITE (REVERSE)




▲ SCHEMATIC
ON-ON
SPDT ILLUMINATED

▲ RING/POWER SYMBOL
ILLUMINATION COLOR: WHITE

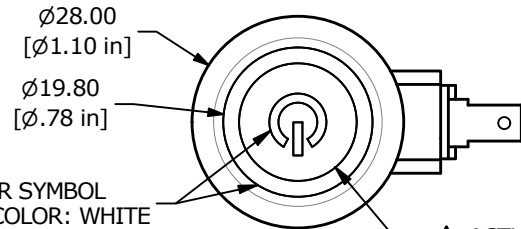

▲ ACTUATOR
STAINLESS STEEL

▲ HOUSING
STAINLESS STEEL

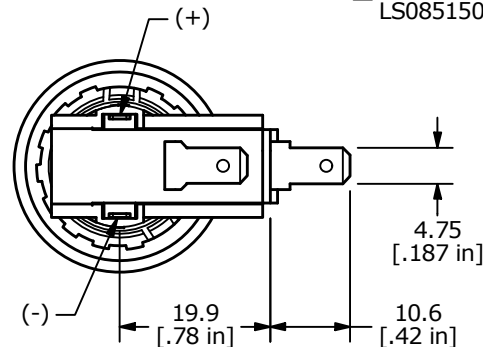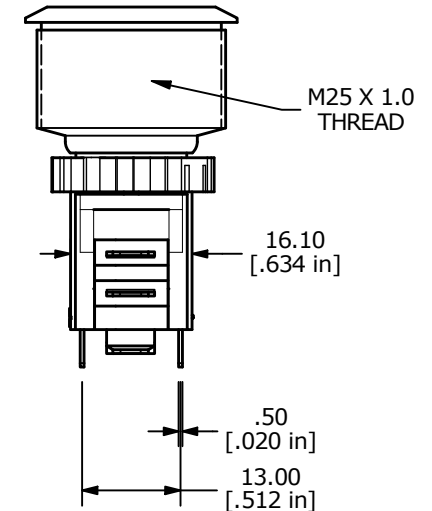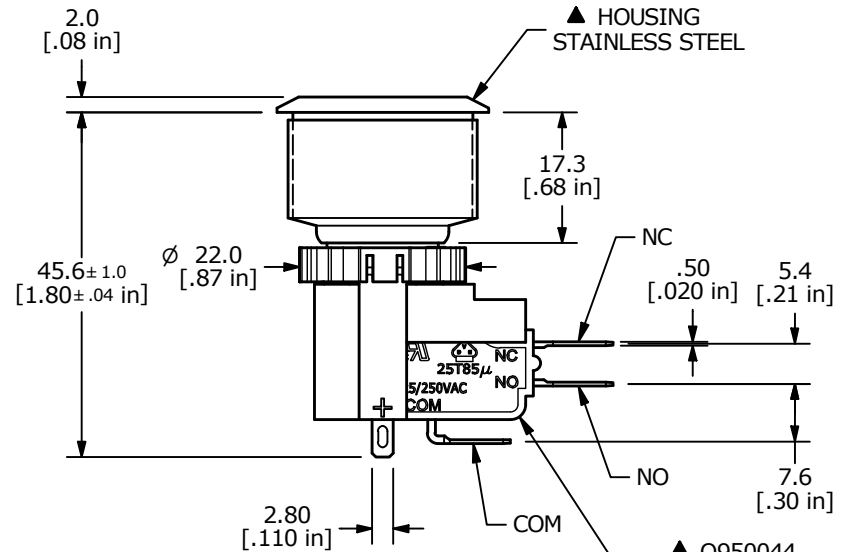

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
- RATING: 15A @125/250VAC
- OPERATING FORCE: 3.5 ±1.5N
- OPERATING TEMP: -25°C to 85°C
- ELECTRICAL LIFE: 10,000 CYCLES MIN.
- MECHANICAL LIFE: 1,000,000 CYCLES TYP.
- INSULATION RESISTANCE: 100 MEGA-OHMS MIN.
- DIELECTRIC STRENGTH: 1500VAC 1 MINUTE (INITIAL VALUE)
- CONTACT RESISTANCE: 100 MILLI-OHMS MAX.
- ▲ DENOTES CRITICAL PARAMETER.
- ▲ 12. LAMP VOLTAGE: 6V
13. TRAVEL: 3.2mm
14. HEX NUT TORQUE: 1-3Nm
15. INGRESS PROTECTION: IP67
- ▲ 16. HARDWARE SUPPLIED: O-RING and HEXNUT

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-101549	Release	01/11/23	MW	TITLE SAV8F13SS603				100123407
					SCALE	DATE	DR	DWG	REV
					1:1	1/5/2023	MW	T958012	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED