
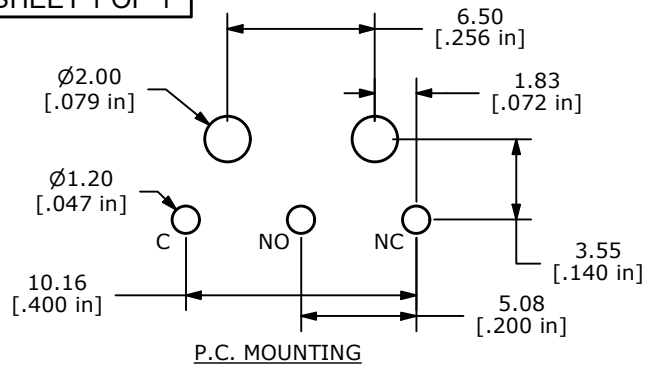
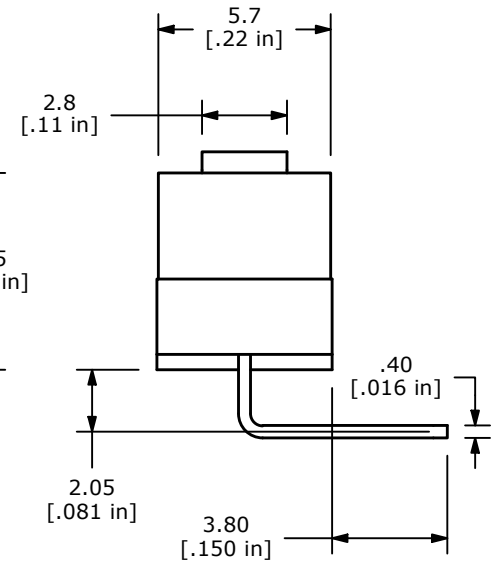
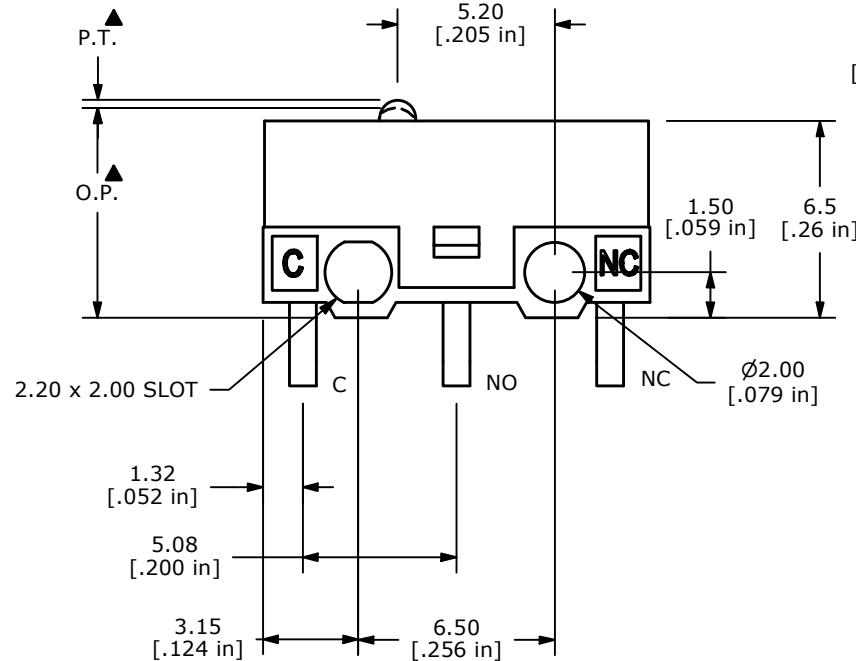
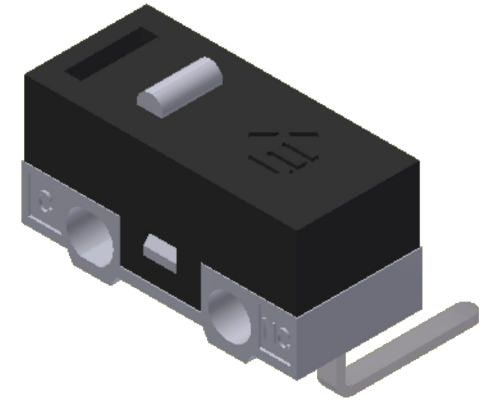


O.P. (MM)	P.T. (MM)
7.0 ± 0.2	0.35 MAX.

O.P. = OPERATING POINT
P.T. = PRE-TRAVEL

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X ± 0.4
X.XX ± 0.25
- RATING: 3A @ 125 VAC UL
1.5A @ 250 VAC UL
- OPERATING FORCE: 130 $\pm$ 40 GRAMS
- OPERATING TEMP: -25°C TO 75°C
- ELECTRICAL LIFE: 10,000 CYCLES MIN.
- MECHANICAL LIFE: 1,000,000 CYCLES MIN.
- INSULATION RESISTANCE: 100 MEGA-OHMS MIN.
- DIELECTRIC STRENGTH: 500VAC - 1 MINUTE
- ▲ DENOTES CRITICAL PARAMETER.
- PACKAGED IN TRAYS, 120 PIECES PER TRAY.

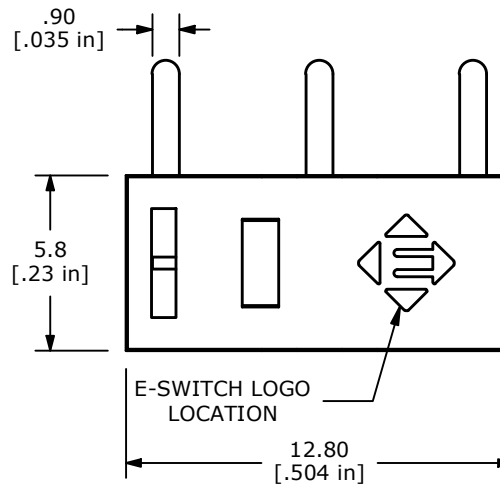

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-102447	Q971048 WAS Q971047	01/02/24	JS	TITLE SS0750300F130V2A				100126425
A	ECO-102427	RELEASE	12/21/23	JS					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV
					4:1	12/14/2023	JS	Q971048	B