
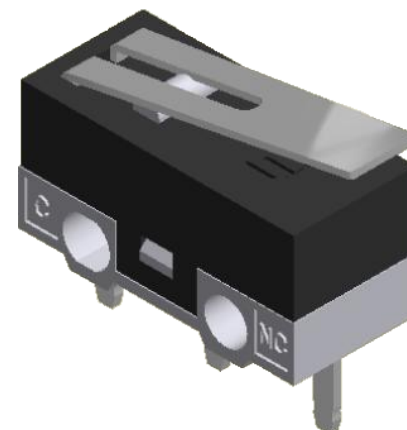


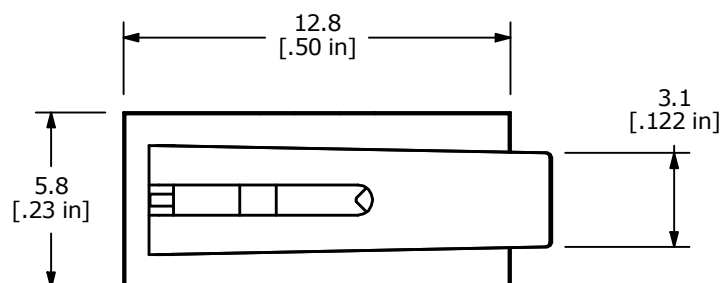

COM
NC NO
CIRCUIT: SPDT

O.P. = OPERATING POINT
P.T. = PRE-TRAVEL

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4
X.XX=± 0.25

1.5 A @ 250VAC UL

5. OPERATING TEMP: -25°C TO 75°C

6. ELECTRICAL LIFE: 10,000 CYCLES MIN.


7. MECHANICAL LIFE: 1,000,000 CYCLES

8. INSULATION RESISTANCE: 100 MEGA-OHMS MIN.

9. DIELECTRIC STRENGTH: 500VAC - 1 MINUTE

10. ▲ DENOTES CRITICAL PARAMETER.

11. PACKAGED IN TRAYS, 120 PIECES PER TRAY.

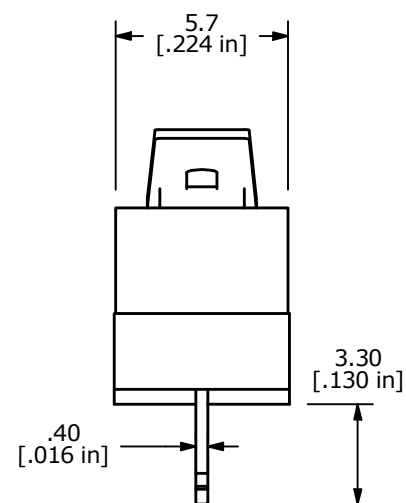

 E-SWITCH®		OBJECT ID 000021325
TITLE	SS0750301F020P1A	

SCALE 4:1	DATE 5/25/2010	DR BLR	DWG Q971009	REV G
--------------	-------------------	-----------	----------------	----------