

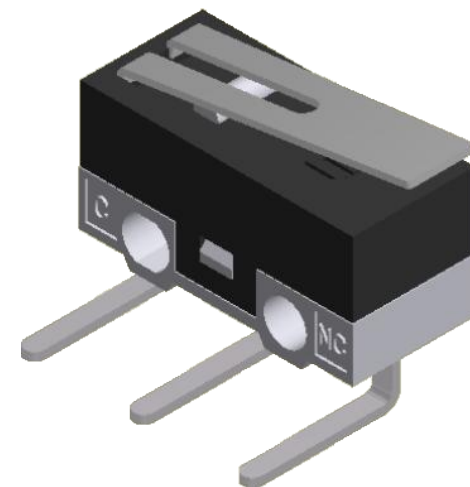
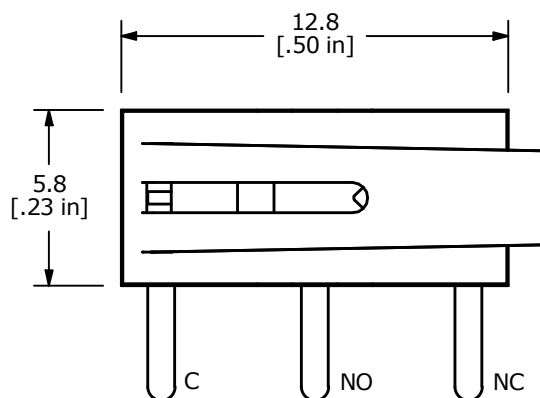


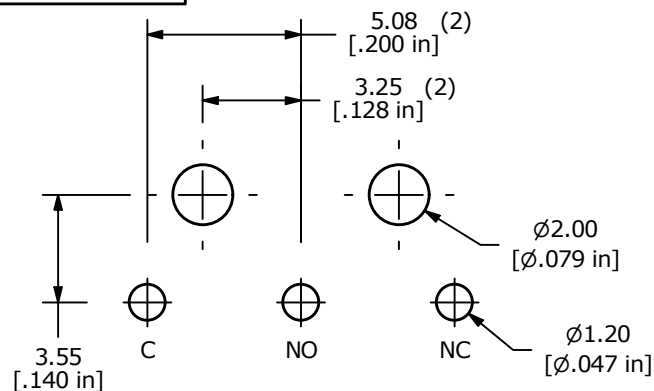

P.C. MOUNTING



O.P. (MM)	P.T. (MM)
8.8 $\pm$ 0.8	1.60 MAX.

O.P. = OPERATING POINT
P.T. = PRE-TRAVEL



NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X $\pm$ 0.4
X.XX $\pm$ 0.25
- RATING: 3A @125VAC
1.5A @250 VAC UL
- OPERATING FORCE: 40 $\pm$ 10 GRAMS
- OPERATING TEMP: -25°C TO 75°C
- ELECTRICAL LIFE: 10,000 CYCLES MIN.
- INSULATION RESISTANCE: 100 MEGA-OHMS MIN.
- DIELECTRIC STRENGTH: 500VAC - 1 MINUTE
- ▲ DENOTES CRITICAL PARAMETER.
- PACKAGED IN TRAYS, 120 PIECES PER TRAY

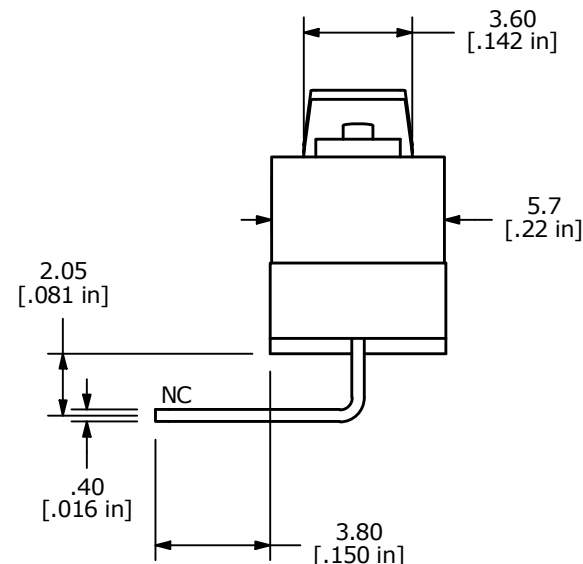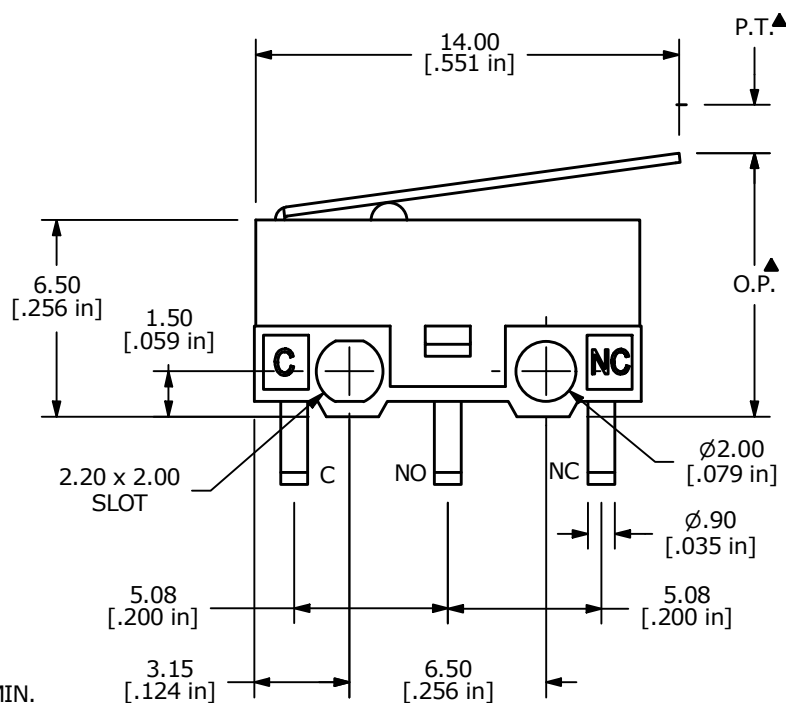

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-102049	PRINT UPDATE	07/03/23	JS	TITLE SS0750301F040V1A				000021350
					SCALE	DATE	DR	DWG	REV
					4:1	5/30/2012	DRG	Q971034	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED