


P.C. MOUNTING






CIRCUIT: SPDT

O.P. (MM)	P.T. (MM)
9.65±0.8	1.35 MAX

O.P. = OPERATING POINT
F.P. = FREE POINT

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4
X.XX=± 0.25
- ▲ 3. RATING: 3A @125VAC
1.5A @250VAC UL
4. OPERATING FORCE: 30 to 55 GRAMS
5. OPERATING TEMP: -25°C TO 75°C
6. ELECTRICAL LIFE: 10,000 CYCLES MIN.
7. MECHANICAL LIFE: 1,000,000 CYCLES
8. INSULATION RESISTANCE: 100 MEGA-OHMS MIN.
9. DIELECTRIC STRENGTH: 500VAC - 1 MINUTE
10. ▲ DENOTES CRITICAL PARAMETER.
11. PACKAGED IN TRAYS, 120 PIECES PER TRAY.

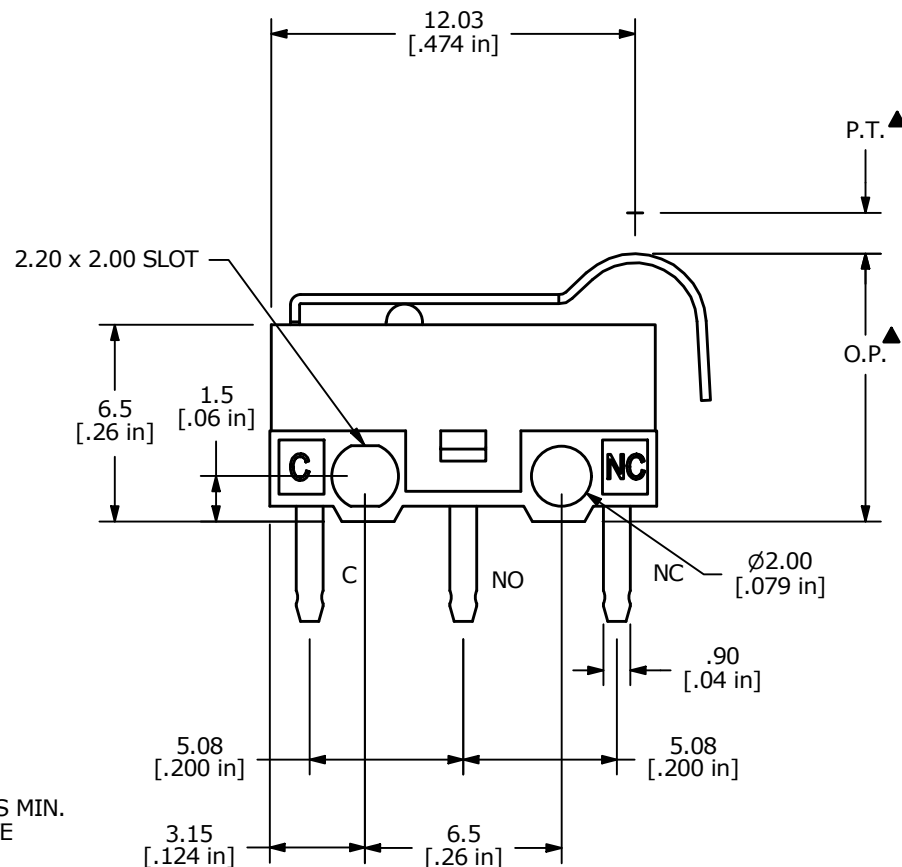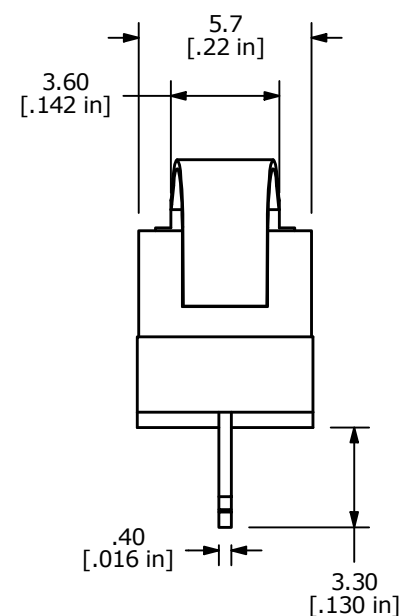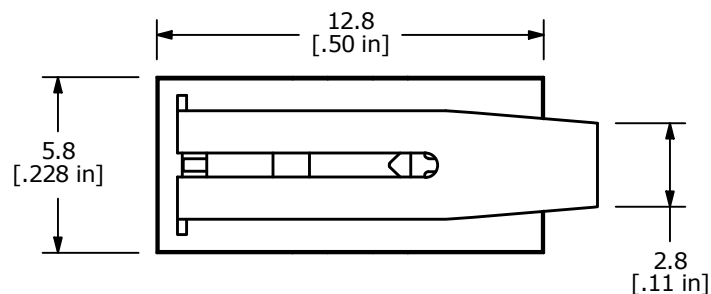

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID
H	ECO-102005	PRINT UPDATE	06/16/23	JS						000021320
					TITLE SS0750303F050P1A					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 4:1	DATE 6/24/2008	DR	DWG Q971004	REV H	