



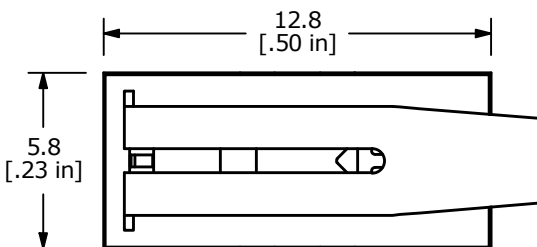


PANEL MOUNTING

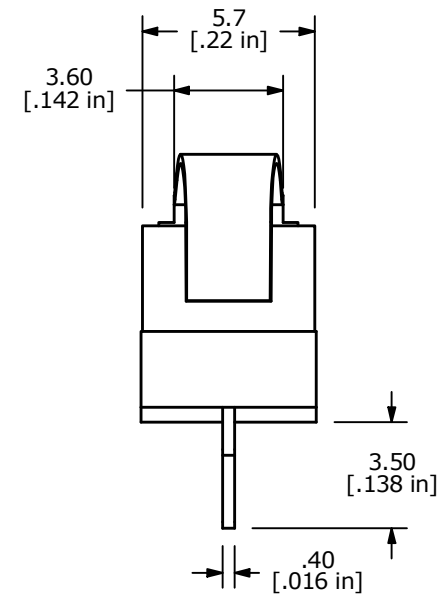

O.P. (MM)	P.T. (MM)
9.65±0.8	1.35 MAX.

O.P. = OPERATING POINT
P.T. = PRE-TRAVEL

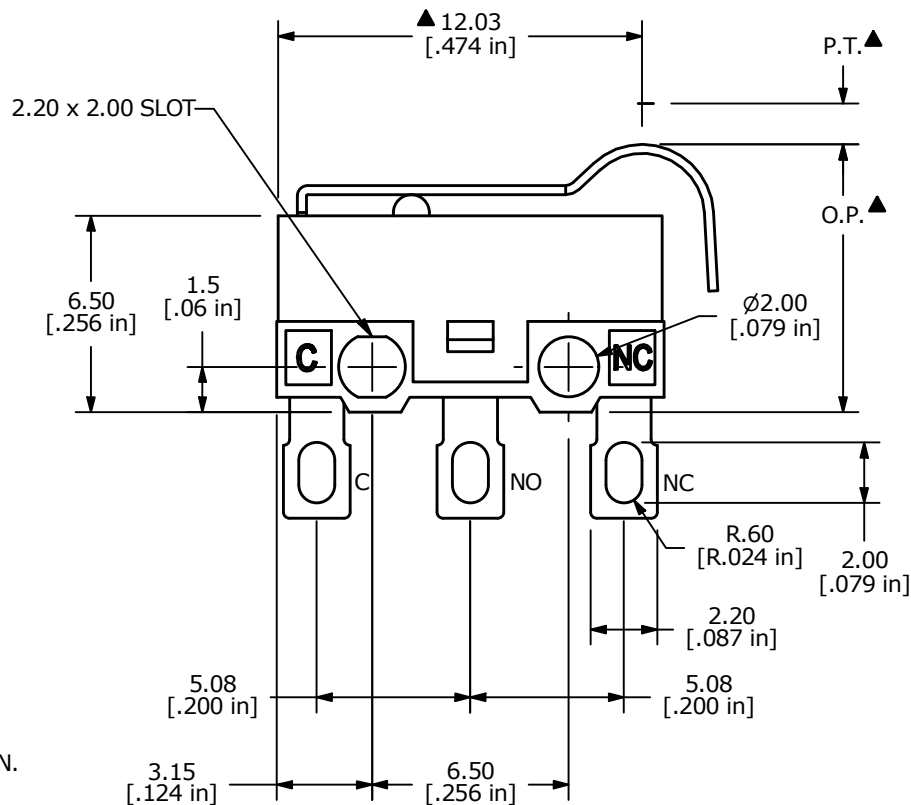

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4
X.XX=± 0.25
- ▲ 3. RATING: 3A @ 125 VAC
1.5A @ 250 VAC UL
4. OPERATING FORCE: 50 ± 15gf
5. OPERATING TEMP: -25°C TO 75°C
6. ELECTRICAL LIFE: 10,000 CYCLES MIN.
7. MECHANICAL LIFE: 1,000,000 CYCLES
8. INSULATION RESISTANCE: 100 MEGA-OHMS MIN.
9. DIELECTRIC STRENGTH: 500VAC - 1 MINUTE
10. ▲ DENOTES CRITICAL PARAMETER.
11. PACKAGED IN TRAYS, 120 PIECES PER TRAY.

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID
E	ECO-102005	PRINT UPDATE	06/16/23	JS						000021323
					TITLE SS0750303F050S1A					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 4:1	DATE 6/24/2008	DR BLR	DWG Q971007	REV E	