



RECOMMENDED
PANEL CUT OUT



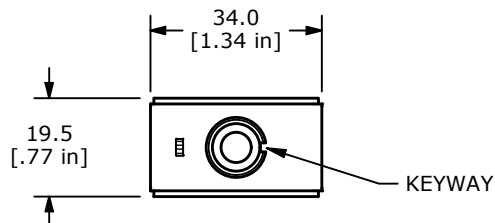


▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
(ON)	OFF	ON
2-3, 5-6	N/A	1-2, 4-5

() = MOMENTARY

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ±0.5
X.XX = ±0.25
3. TERM. NOS. FOR REFERENCE ONLY
4. ELECTRICAL LIFE: 6,000 CYCLES
5. OPERATING TEMP: 0°C to 85°C
6. CONTACT RESISTANCE: 50mΩ MAX. INITIAL
7. INSULATION RESISTANCE: 2MΩ AT 500VDC
8. DIELECTRIC STRENGTH: 1000VAC FOR 1 MINUTE
9. ▲ DENOTES CRITICAL PARAMETER
10. CONTACT RATING: 20A 125VAC,
15A 277VAC
1.5HP 125/277VAC
- ▲ 11. SUPPLIED HARDWARE: 2 HEXNUTS

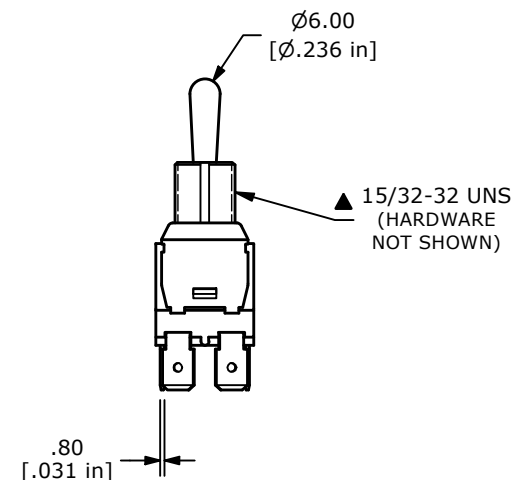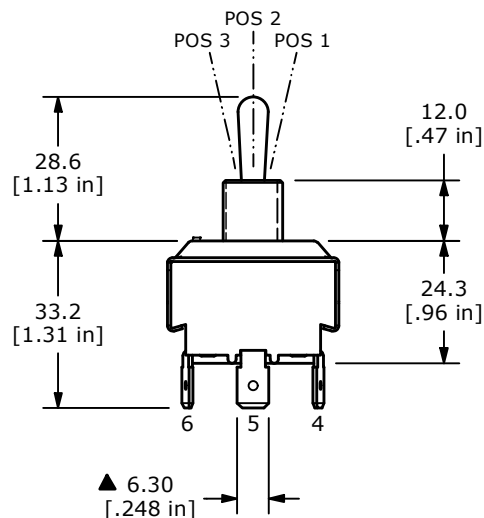

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®				OBJECT ID
B	ECO-102588	print update	03/08/24	MW					100126882
					TITLE ST24JD02				
					SCALE 2:3	DATE 2/21/2024	DR MW	DWG 34-ST24JD02	REV B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED