

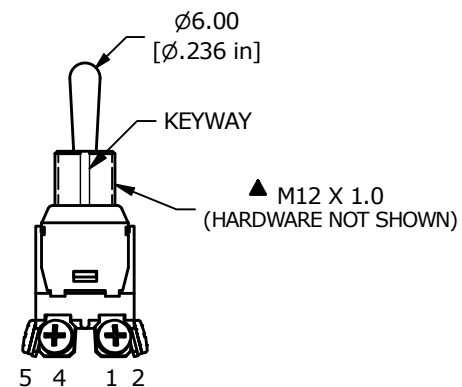
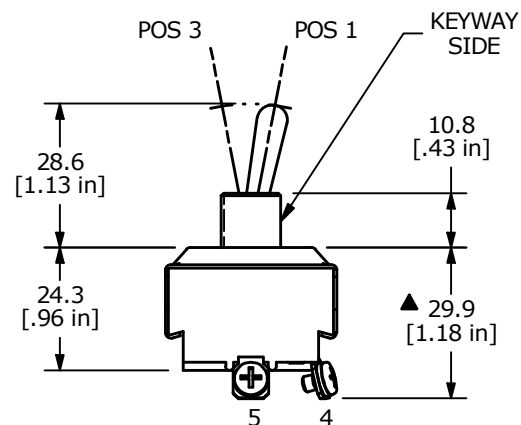


RECOMMENDED PANEL CUT OUT

▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
OFF	N/A	ON
OPEN	N/A	1-2, 4-5

NOTES:

- ALL DIMENSIONS IN MM
- GENERAL TOLERANCE: X.X = ± 0.5
X.XX = ± 0.25
- TERM. NOS. FOR REFERENCE ONLY
- ELECTRICAL LIFE: 6,000 CYCLES
- OPERATING TEMP: 0°C to 85°C
- CONTACT RESISTANCE: 50mΩ MAX. INITIAL
- INSULATION RESISTANCE: 2MΩ AT 500VDC
- DIELECTRIC STRENGTH: 1000VAC FOR 1 MINUTE
- ▲ DENOTES CRITICAL PARAMETER
- CONTACT RATING: 20A 125VAC,
15A 277VAC
2HP 125/277VAC
- SUPPLIED HARDWARE: 2 HEXNUTS



E-SWITCH®

OBJECT ID
000001107

C	24486	DRAWING UPDATE CAD TO INVENTOR	9/14/20	MJR
B	19380	CORRECTED PANEL CUTOUT AND SPECS	11/16/10	CAB
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE ST262D00

SCALE
2:3DATE
8/5/2009DR
CABDWG
34-ST262D00REV
C