

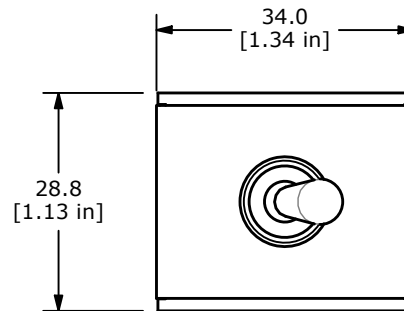
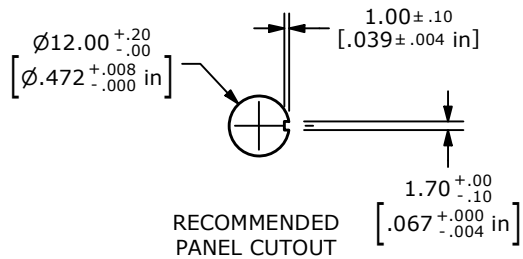


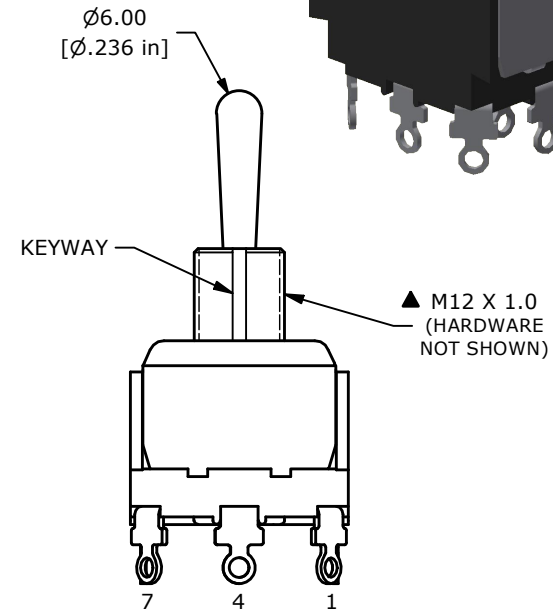


▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	N/A	ON
2-3, 5-6, 8-9	N/A	1-2, 4-5, 7-8

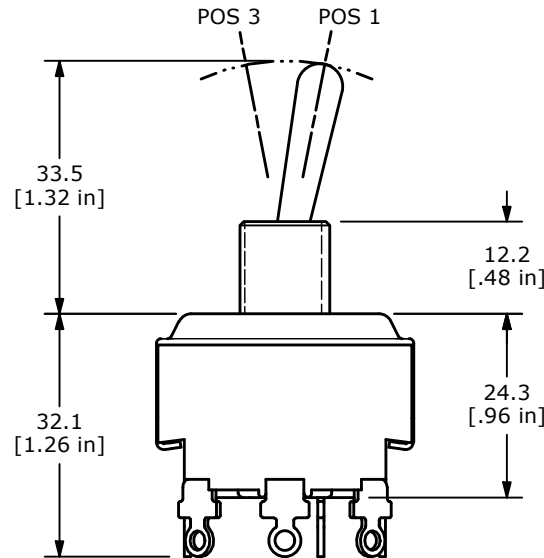

NOTES:

- ALL DIMENSIONS IN MM
- GENERAL TOLERANCE: X.X = ± 0.5
X.XX = ± 0.25
- TERM. NOS. FOR REFERENCE ONLY
- ELECTRICAL LIFE: 6,000 CYCLES
- OPERATING TEMP: 0°C to 85°C
- CONTACT RESISTANCE: $50\text{m}\Omega$ MAX. INITIAL
- INSULATION RESISTANCE: $2\text{M}\Omega$ AT 500VDC
- DIELECTRIC STRENGTH: 1000VAC FOR 1 MINUTE
- ▲ DENOTES CRITICAL PARAMETER
- CONTACT RATING: 24A 125VAC
15A 277VAC
2HP 125/277VAC
- ▲ 11. SUPPLIED HARDWARE: 2 HEXNUTS



REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-102716	Release	05/17/24	MW	TITLE ST32SE00				100127384
					SCALE	DATE	DR	DWG	REV
					1:1	5/7/2024	MW	34-ST32SE00	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED