

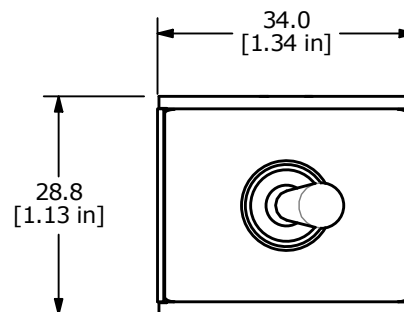
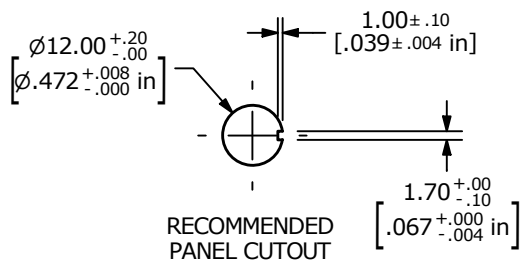
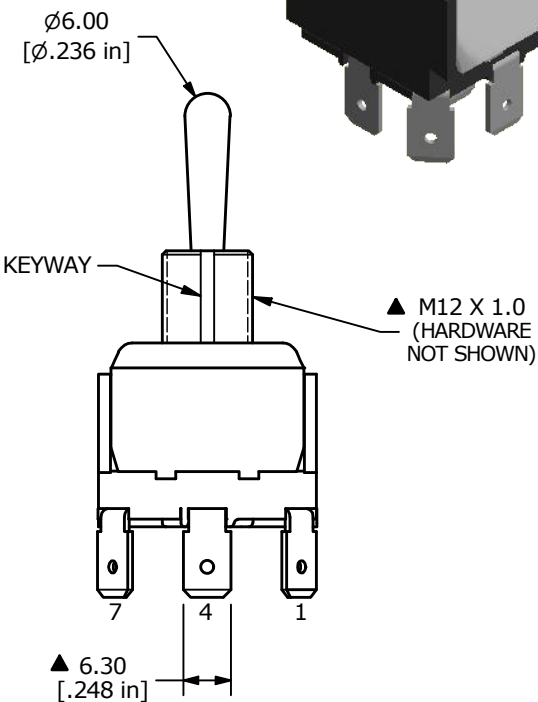


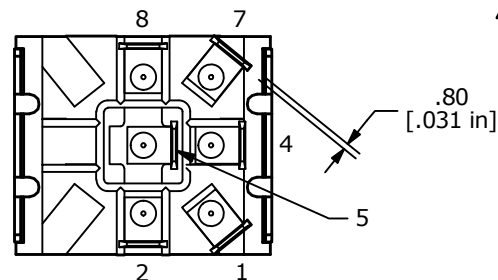

▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
OFF	N/A	ON
OPEN	N/A	1-2, 4-5, 7-8

NOTES:

- ALL DIMENSIONS IN MM
- GENERAL TOLERANCE: X.X = ± 0.5
X.XX = ± 0.25
- TERM. NOS. FOR REFERENCE ONLY
- ELECTRICAL LIFE: 6,000 CYCLES
- OPERATING TEMP: 0°C to 85°C
- CONTACT RESISTANCE: 50mΩ MAX. INITIAL
- INSULATION RESISTANCE: 2MΩ AT 500VDC
- DIELECTRIC STRENGTH: 1000VAC FOR 1 MINUTE
- ▲ DENOTES CRITICAL PARAMETER
- CONTACT RATING: 24A 125VAC
15A 277VAC
2HP 125/277VAC
- SUPPLIED HARDWARE: 2 HEXNUTS

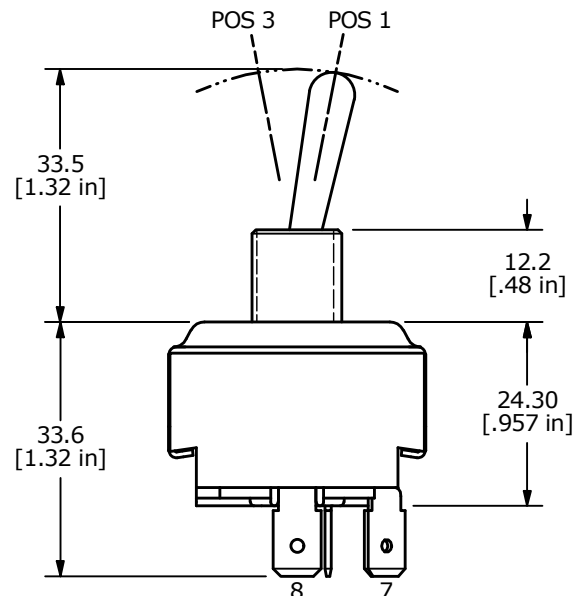

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
C	ECO-100721	rating to 24A from 20A	02/16/22	MW	TITLE ST34RE00				000001117
					SCALE	DATE	DR	DWG	REV
					1:1	8/5/2009	CAB	34-ST34RE00	C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED