
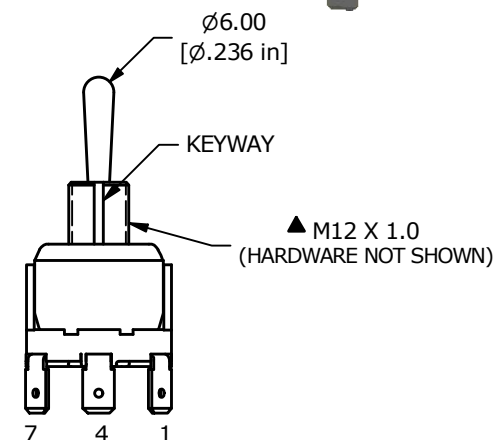

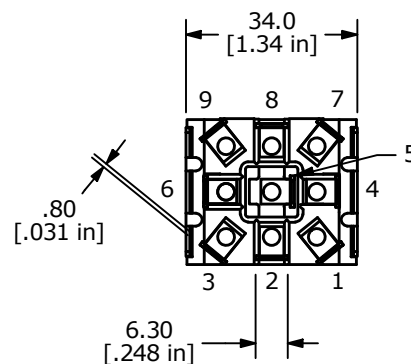
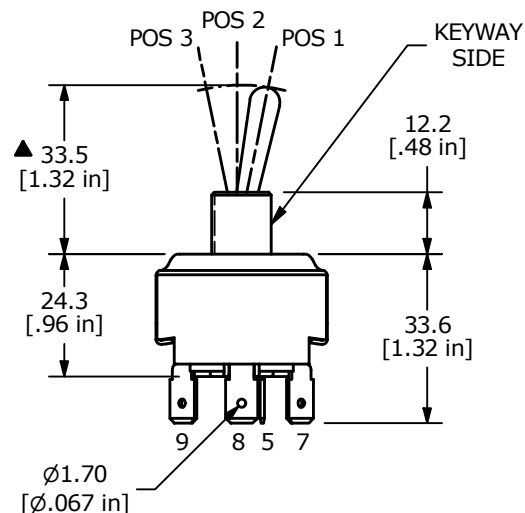


RECOMMENDED PANEL CUT OUT

▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-3, 5-6, 8-9	OPEN	1-2, 4-5, 7-8

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.5
X.XX = ± 0.25
3. TERM. NOS. FOR REFERENCE ONLY
4. ELECTRICAL LIFE: 6,000 CYCLES
5. OPERATING TEMP: 0°C to 85°C
6. CONTACT RESISTANCE: 50m Ω MAX. INITIAL
7. INSULATION RESISTANCE: 2M Ω AT 500VDC
8. DIELECTRIC STRENGTH: 1000VAC FOR 1 MINUTE
9. ▲ DENOTES CRITICAL PARAMETER
10. CONTACT RATING: 24A 125VAC,
15A 277VAC
2HP 125/277VAC
- ▲ 11. SUPPLIED HARDWARE: 2 HEXNUTS



TITLE ST34TE00

SCALE
2:3DATE
8/6/2009DR
CABDWG
34-ST34TE00REV
B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED