
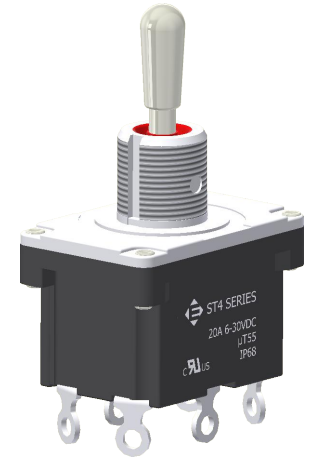
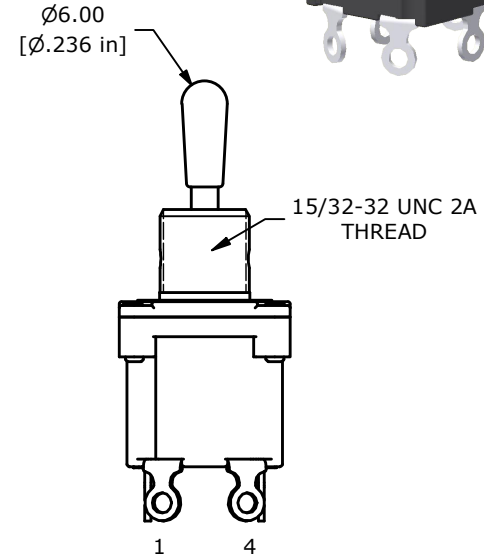
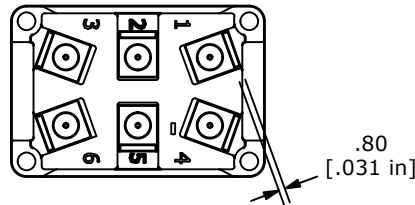
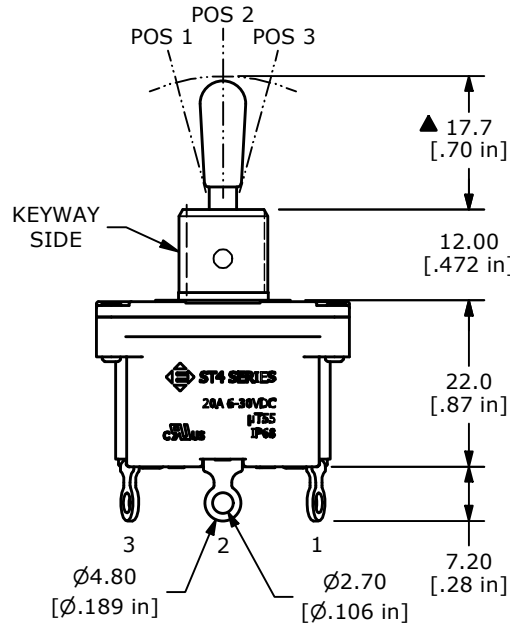


RECOMMENDED PANEL CUT-OUTS

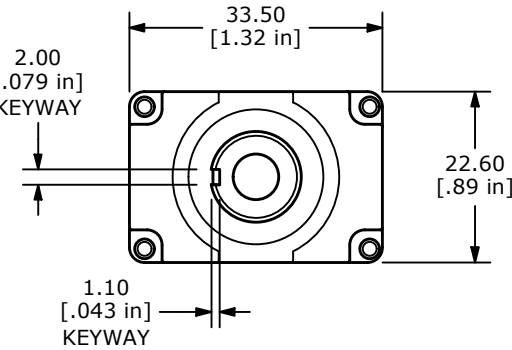

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
(ON)	OFF	(ON)
(1-2), (4-5)	OPEN	(2-3), (5-6)

(ON) = MOMENTARY

- NOTES:
- ALL DIMENSIONS IN MM [INCH]
 - GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
 - TERM. NUMBERS FOR REF. ONLY
 - ▲ 4. RATING: 20A 6-30VDC μ T55
 - ELECTRICAL LIFE: 10,000 CYCLES
 - CONTACT RESISTANCE: <20 MILLI-OHMS INITIAL
 - DIELECTRIC STRENGTH: >1,500V AC 1MIN
 - INSULATION RESISTANCE: >100MOHMS
 - OPERATING TEMP: -10°C to 55°C
 - INGRESS PROTECTION: IP68
 - ▲ DENOTES CRITICAL PARAMETER.
 - SUPPLIED HARDWARE: LOCK WASHER and TWO HEXNUTS

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-102895	RELEASE	08/07/24	JS	TITLE ST4DP10DT1S1				100128000
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV
					1:1	7/31/2024	JS	14-ST4DP10DT1S1	A