





RECOMMENDED PANEL CUT-OUTS

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
OFF	N/A	(ON)
OPEN	N/A	2-3, 5-6

(ON) = MOMENTARY

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERM. NOS. FOR REF. ONLY
- RATING: 16(8)A 125/250VAC μ T55
- ELECTRICAL LIFE: 6,000 CYCLES
- CONTACT RESISTANCE: <20 MILLI-OHMS INITIAL
- DIELECTRIC STRENGTH: >1,500V AC 1MIN
- INSULATION RESISTANCE: >100MOHMS
- OPERATING TEMP: -10°C to 55°C
- INGRESS PROTECTION: IP68
- ▲ DENOTES CRITICAL PARAMETER.
- SUPPLIED HARDWARE: LOCK WASHER AND TWO HEXNUTS.

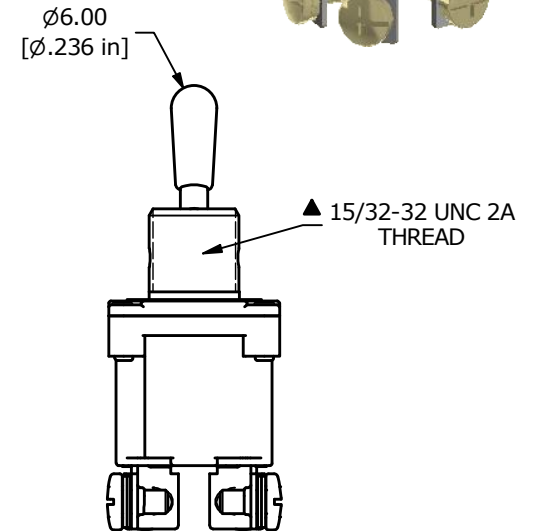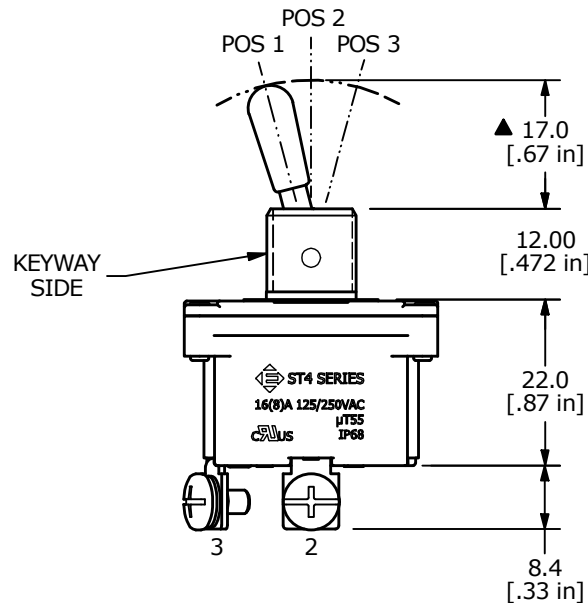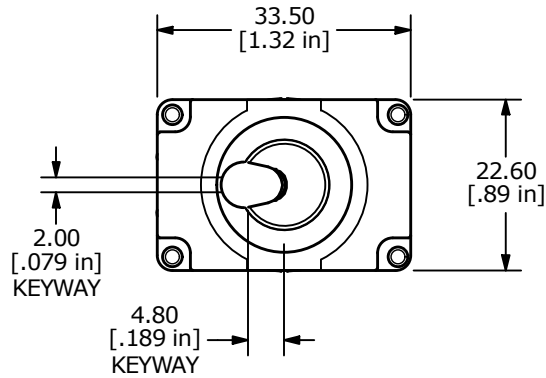

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-101493	correct Terminal numbers	01/09/23	MW	TITLE ST4DP1AT1S2				100122351
					SCALE	DATE	DR	DWG	REV
					1:1	7/15/2022	MJR	14-ST4DP1AT1S2	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED