
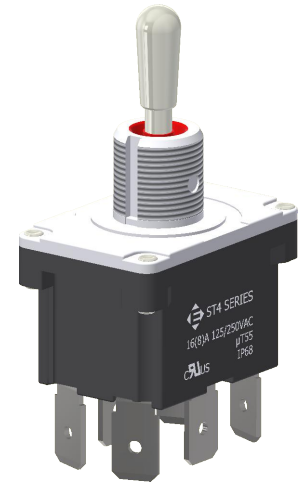
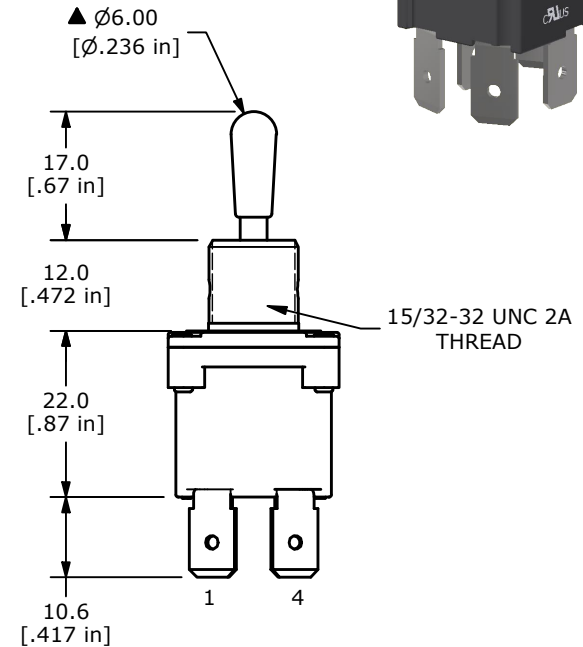
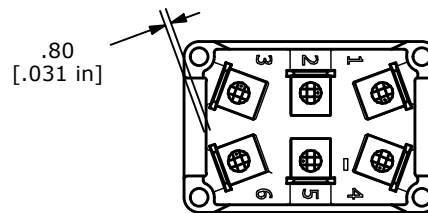
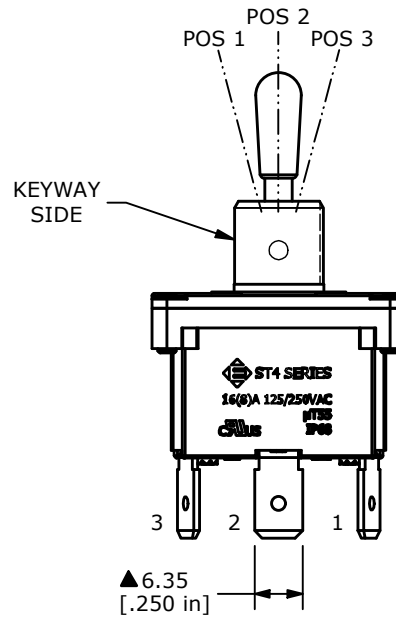


RECOMMENDED PANEL CUT-OUTS

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
1-2, 4-5	OPEN	2-3, 5-6

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
- ▲ 4. RATING: 16(8)A 125/250VAC μ T55
5. ELECTRICAL LIFE: 10,000 CYCLES
6. CONTACT RESISTANCE: <20 MILLI-OHMS INITIAL
7. DIELECTRIC STRENGTH: >1,500V AC 1MIN
8. INSULATION RESISTANCE: >100MOHMS
9. OPERATING TEMP: -10°C to 55°C
10. INGRESS PROTECTION: IP68
11. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 12. SUPPLIED HARDWARE: LOCK WASHER, 2 HEXNUTS, AND KEYLOCK WASHER

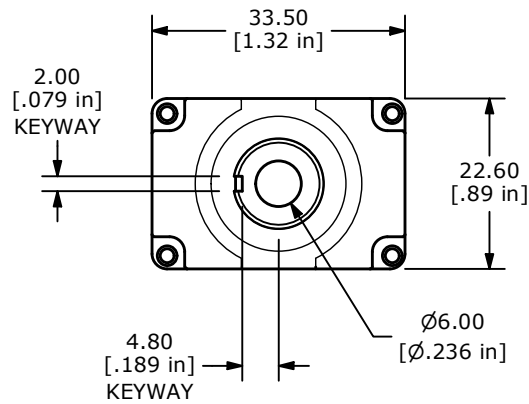

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-102297	RELEASE	10/17/23	JS	TITLE ST4DP8AT1C2				100125838
					SCALE	DATE	DR	DWG	REV
					1:1	10/11/2023	JS	14-ST4DP8AT1C2	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED