





RECOMMENDED PANEL CUT-OUTS

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	(ON)
1-2, 4-5	OPEN	(2-3), (5-6)

(ON) = MOMENTARY

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERM. NUMBERS FOR REF. ONLY
- ▲ RATING: 16(8)A 125/250VAC μ T55
- ELECTRICAL LIFE: 10,000 CYCLES
- CONTACT RESISTANCE: <20 MILLI-OHMS INITIAL
- DIELECTRIC STRENGTH: >1,500V AC 1MIN
- INSULATION RESISTANCE: >100MOHMS
- OPERATING TEMP: -10°C to 55°C
- INGRESS PROTECTION: IP68
- ▲ DENOTES CRITICAL PARAMETER.
- SUPPLIED HARDWARE: LOCK WASHER and TWO HEXNUTS

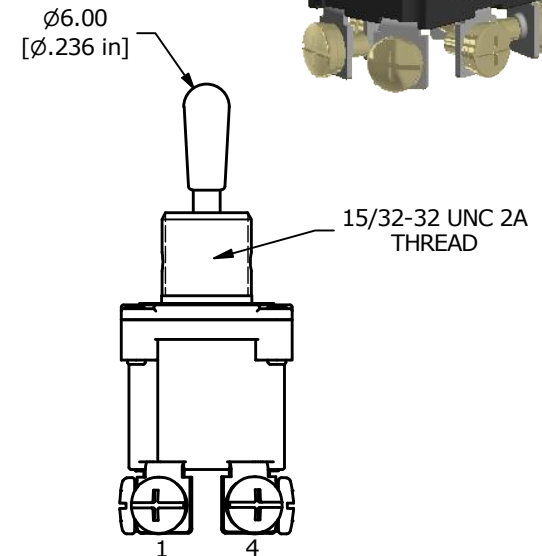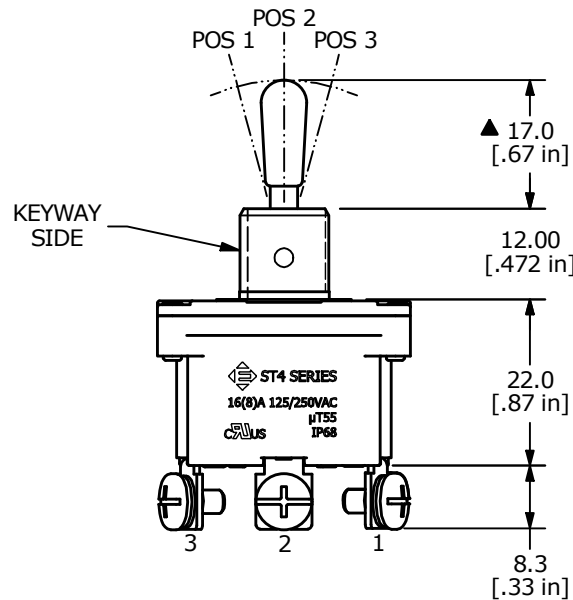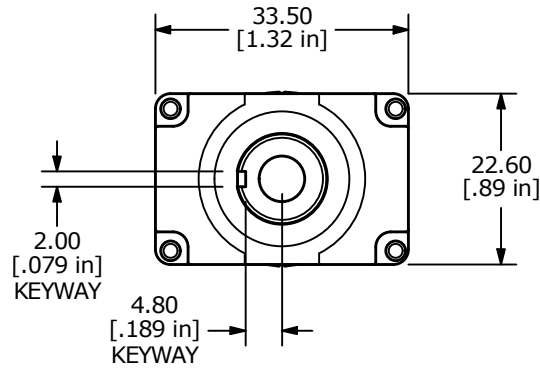

REV	ECO NO	DESCRIPTION	DATE	BY					OBJECT ID
A	ECO-101110	Release	07/15/22	MW	TITLE ST4DP9AT1S2				100122325
					SCALE 1:1	DATE 7/11/2022	DR MW	DWG 14-ST4DP9AT1S2	REV A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED