

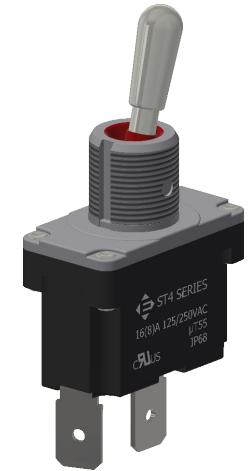
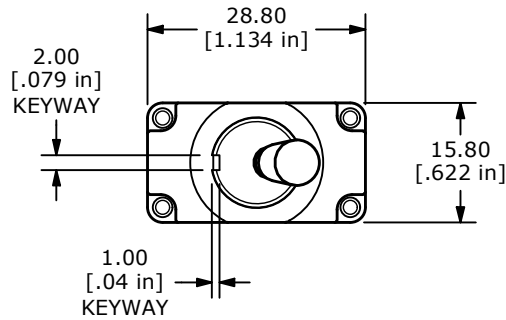


RECOMMENDED PANEL CUTOUTS

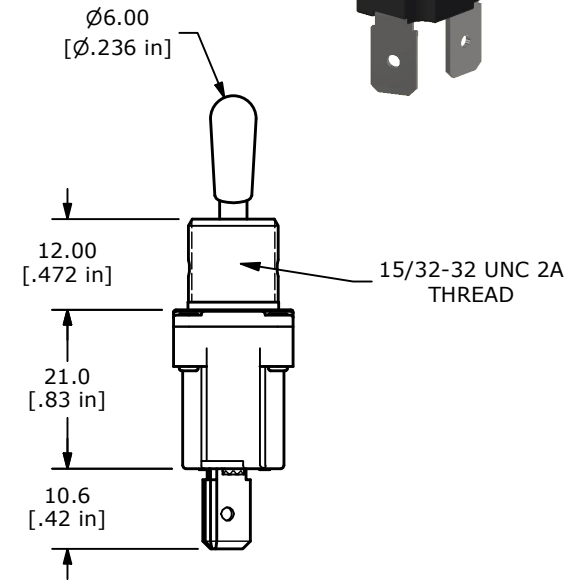

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
OFF	N/A	ON
OPEN	N/A	2-3

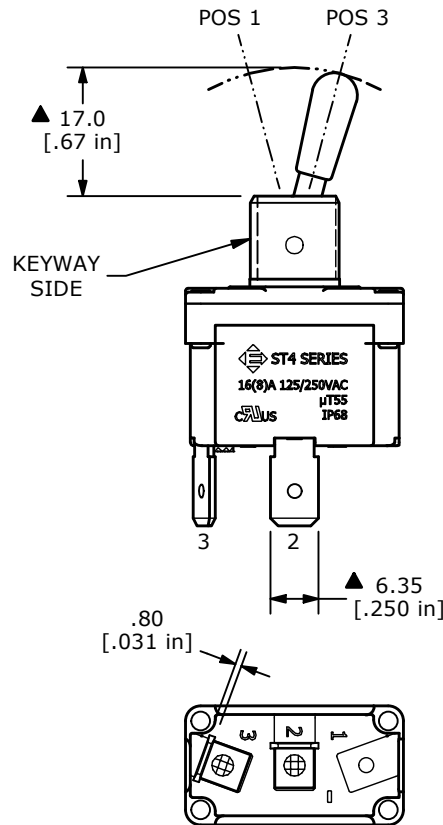

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERM. NUMBERS FOR REF. ONLY
- ▲ 4. RATING: 16(8)A 125/250VAC μ T55
5. ELECTRICAL LIFE: 6,000 CYCLES
6. CONTACT RESISTANCE: <20 MILLI-OHMS INITIAL
7. DIELECTRIC STRENGTH: >1,500V AC 1MIN
8. INSULATION RESISTANCE: >100MOHMS
9. OPERATING TEMP: -10°C to 55°C
10. INGRESS PROTECTION: IP68
11. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 12. SUPPLIED HARDWARE: INTERNAL TOOTH LOCK WASHER and 2 HEXNUTS.

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-102041	Release	06/29/23	MW	TITLE ST4SP2AT1C2				100124986
					SCALE	DATE	DR	DWG	REV
					1:1	6/20/2023	JS	14-ST4SP2AT1C2	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED