




RECOMMENDED PANEL CUT-OUTS

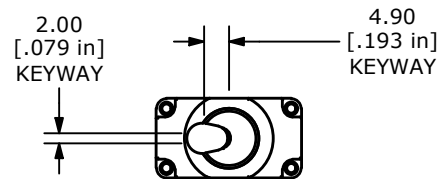

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
OFF	N/A	ON
	N/A	2-3

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERM. NOS. FOR REF. ONLY
- RATING: 20(8)A 125/250VAC μ T55
- ELECTRICAL LIFE: 6,000 CYCLES
- CONTACT RESISTANCE: <20 MILLI-OHMS INITIAL
- DIELECTRIC STRENGTH: >1,500V AC 1MIN
- INSULATION RESISTANCE: >100MOHMS
- OPERATING TEMP: -10°C to 55°C
- INGRESS PROTECTION: IP68
- ▲ DENOTES CRITICAL PARAMETER.
- SUPPLIED HARDWARE: TOOTH WASHER AND TWO HEXNUTS.

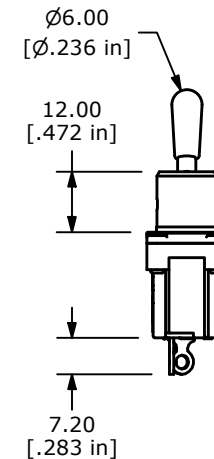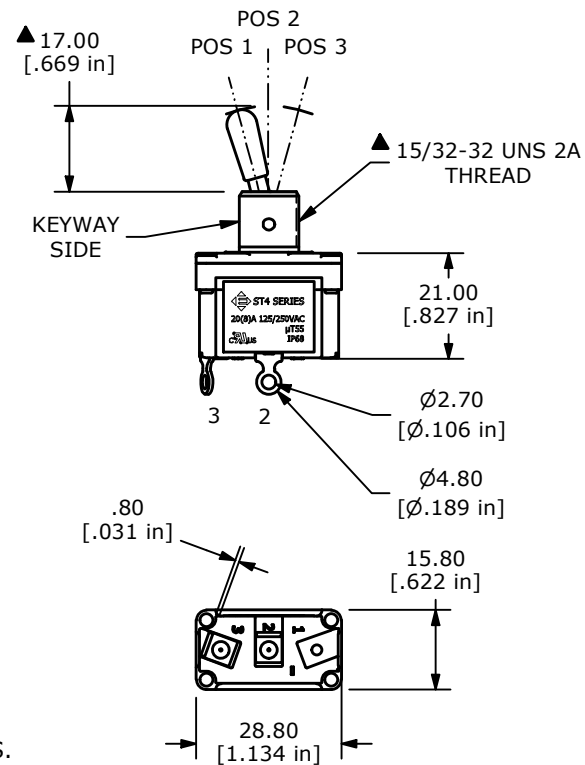

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
C	ECO-101584	REMOVED 2-3 FROM CHART POS. 1	01/18/23	MR	TITLE ST4SP2BS1				100116666
B	ECO-100143	UPDATED LABEL WITH LOGO AND APPROVALS	06/10/21	MR					
A	ECO-100125	NEW RELEASE	05/19/21	MR	SCALE	DATE	DR	DWG	REV
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					2:3	5/17/2021	MJR	14-ST4SP2BT1S1	C