



RECOMMENDED PANEL CUT-OUTS

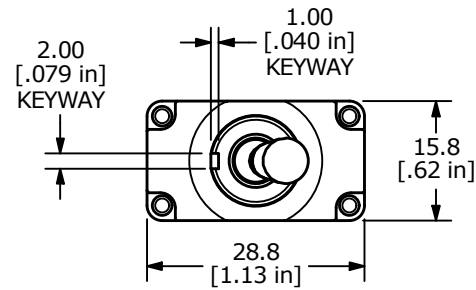


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	N/A	ON
1-2	N/A	2-3

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 20A 6-30VDC μ T55
5. ELECTRICAL LIFE: 10,000 CYCLES
6. CONTACT RESISTANCE: <20 MILLI-OHMS INITIAL
7. DIELECTRIC STRENGTH: >1,500V AC 1MIN
8. INSULATION RESISTANCE: >100MOHMS
9. OPERATING TEMP: -10°C to 55°C
10. INGRESS PROTECTION: IP68
11. ▲ DENOTES CRITICAL PARAMETER.
12. SUPPLIED HARDWARE: INTERNAL TOOTH LOCK WASHER and 2 HEXNUTS.

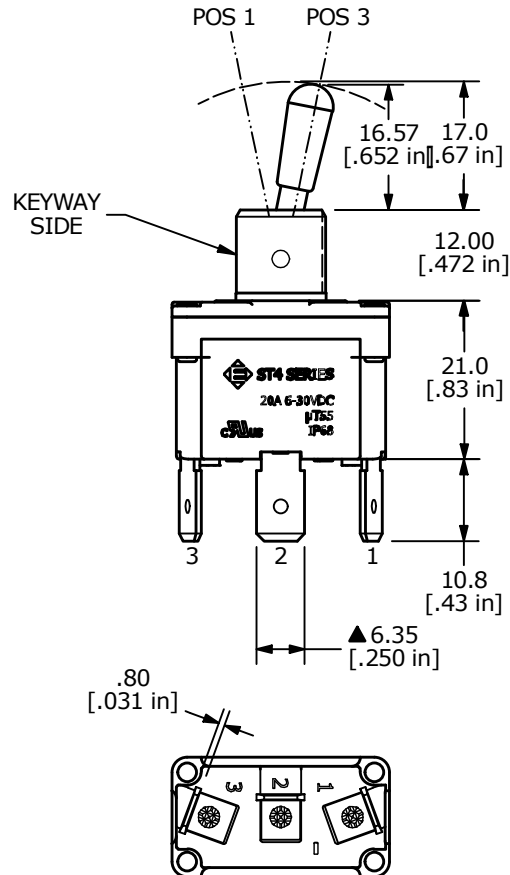

Ø6.00
[Ø.236 in]

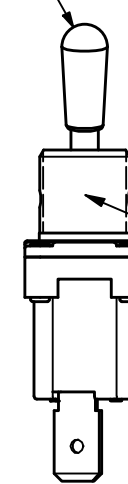

15/32-32 UNC 2A
THREAD



REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-101595	RELEASE	02/01/23	JS	TITLE ST4SP3DT1C2				100123537
					SCALE	DATE	DR	DWG	REV
					1:1	1/24/2023	JS	14-ST4SP3DT1C2	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED