
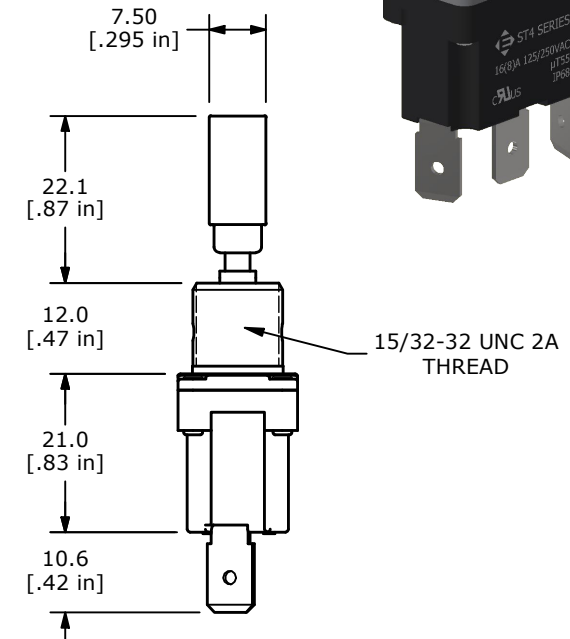

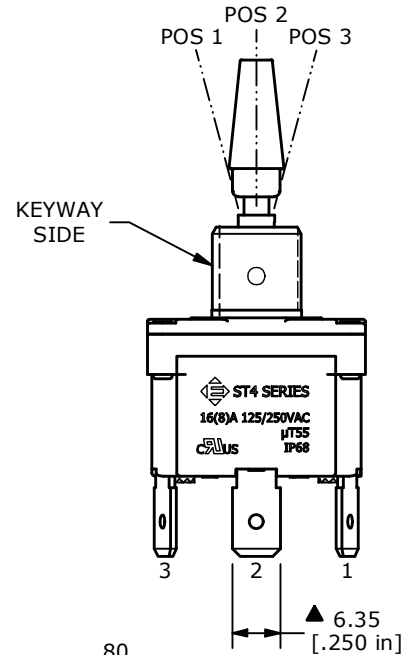


RECOMMENDED PANEL CUT-OUTS

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-1	OPEN	2-3

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERM. NOS. FOR REF. ONLY
- RATING: 16(8)A 125/250VAC μ T55
- ELECTRICAL LIFE: 10,000 CYCLES
- CONTACT RESISTANCE: <20 MILLI-OHMS INITIAL
- DIELECTRIC STRENGTH: >1,500V AC 1MIN
- INSULATION RESISTANCE: >100MOHMS
- OPERATING TEMP: -10°C to 55°C
- INGRESS PROTECTION: IP68
- ▲ DENOTES CRITICAL PARAMETER.
- SUPPLIED HARDWARE: LOCK WASHER, 2 HEXNUTS and KEYLOCK WASHER

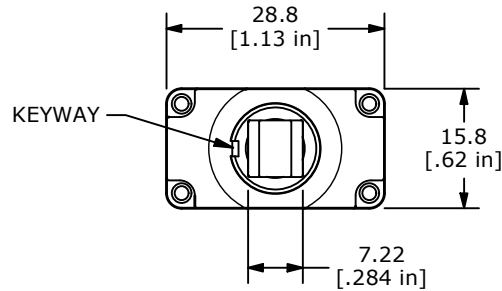

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
E	ECO-102303	update actuator length to 22.1mm	11/02/23	MW	TITLE ST4SP8AT2C2				100105685
					SCALE	DATE	DR	DWG	REV
					1:1	5/17/2021	MJR	14-ST4SP8AT2C2	E

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED